

CESM Tutorial

**NCAR Earth System Laboratory
CESM Software Engineering Group**

**CESM 1.2.x and CESM1.1.x
CESM1.0.5 and previous (see earlier tutorials)**

NCAR is sponsored by the National Science Foundation



Outline

- **Release Homepage on Web**
- **Software & Hardware Requirements**
- **One-Time Setup**
 - A) **Registration and Source Code Download**
 - B) **Create an Input Data Root Directory**
 - C) **Porting**
- **Creating & Running a Case**
 - 1) **Create a New Case**
 - 2) **Invoke cesm_setup**
 - 3) **Build the Executable**
 - 4) **Initial Run and Output Data**
 - 5) **Continuation Runs**
- **Getting More Help**
- **Appendix**

CESM 1.2 Release Web Page

<http://www.cesm.ucar.edu/models/cesm1.2/>

Release notes →

Scientific validation →

Post-Processing Tools →

User's Guide →

Component Model Documentation →

External Libraries →

Input Data →

Timing Table →

CESM1.2 PUBLIC RELEASE

ABOUT CESM 1.2

TO DO - general release description

CESM1.2 Release Notes includes What's New - Science, What's New - Software, Answer-Changing Features, Supported Machines, and Known Problems.

SCIENTIFIC VALIDATION

Scientific validation consists of a multi-decadal model run of the given component set at the target resolution, followed by scientific review of the model output diagnostics. All scientifically supported component sets are also accompanied by diagnostic and model output data.

CESM1.2 Scientifically Supported Model Configurations - CESM1.2 has the flexibility to configure cases with many different combinations of component models, grids, and models settings.

Validated CESM1.2 model results and diagnostics will be added to the site as they become available.

DIAGNOSTIC PACKAGES AND NAMING CONVENTIONS

- Experiments & Diagnostics - CESM1.2 experiment results and diagnostics will be added to the site as they become available.
- Post Processing Utilities
- Model File Naming Conventions
- Experiment Case Naming Conventions

MODEL DOCUMENTATION

CESM1.2

- User's Guide
- Histories, Resolutions, Component sets
- Model Component Nomenclature
- \$CASEROOT and files

Atmosphere Models <ul style="list-style-type: none">• Community Atmosphere Model (CAM, CAM-OSU, WACCM)• Climatological Data Model (ccsm)	Land Models <ul style="list-style-type: none">• Community Land Model (CLM)• Climatological Data Model (ccsm)	Sea Ice Models <ul style="list-style-type: none">• Community Ice Code (occl)• Climatological Ice Model (occl)
--	--	---

Coupler
• CESM Coupler (CPL)

Ocean Models <ul style="list-style-type: none">• Parallel Ocean Program (POP, POP2, POP3)• Climatological/Slab-Ocean Data Model (ccsm)	Land Ice Models <ul style="list-style-type: none">• Community Ice Sheet Model (cism-cism)	River Models <ul style="list-style-type: none">• River Transport Model (rtm)• Climatological River Runoff Model (ccsm)
--	--	--

EXTERNAL LIBRARY DOCUMENTATION

- Parallel I/O Library (PIO)
- Model Coupling Toolkit (MCT)
- Earth System Modeling Framework (ESMF)

MODEL INPUT DATA

The input data necessary to run all supported component sets is made available from a public Subversion input data repository. Note that the inputdata repository has much more data in it than you need to run CESM1.2 — **DO NOT attempt to svn checkout the whole input data repository.** The CESM1.2 User's Guide explains how to obtain the subset of input data required for your needs.

PERFORMANCE AND LOAD BALANCING DATA

The timing table provides performance data that will continue to evolve due to changes in the model, machine hardware and input from the user community. For CESM1.2, please refer to the CESM1.1.1 Timing Table.

CESM PROJECT

The Community Earth System Model (CESM) is a fully-coupled, global climate model that provides state-of-the-art computer simulations of the Earth's past, present, and future climate states.

CESM is sponsored by the National Science Foundation (NSF) and the U.S. Department of Energy (DOE). Administration of the CESM is maintained by the Climate and Global Dynamics Division (CGD) at the National Center for Atmospheric Research (NCAR).

MODEL SOURCE CODE

Copyright and Terms of Use
All CESM source code is subject to the following [Copyright Notice and Disclaimer](#).

CESM Release Versions

CESM X.Y.Z - CESM model release versions include three numbers separated by a dot (.), where

- X - corresponds to the major release number indicating significant science changes.
- Y - corresponds to the addition of new infrastructure and new science capabilities for targeted components.
- Z - corresponds to release bug fixes and machine updates.

Acquiring the Release Code

The source code for CESM releases is distributed through a public Subversion code repository. This code can be checked out using Subversion client software, such as the command tool svn, or simply view the [latest version with a web browser](#).

A short [registration](#) is required to access the repository. After registering, you will receive an email containing a user name and password that is necessary to gain access to the repository.

Acquisition of the code is more fully described in the most recent version of the [CESM1.2 User's Guide](#).

REPORTING A PROBLEM

If you have any problems, please first read the User's Guide including the sections on FAQs and User Cases. Please also refer to the [CESM Bulletin Board](#), which is in place to facilitate communication within the CESM community. Finally, please also refer to the [Release Notes](#) entries that are provided with every release and release update. If questions or problems still exist, then please send an email to cesm-help@cgd.ucar.edu. Support questions will be answered as resources are available.

CESM SUPPORT POLICY

CESM Support Policy - November 2012

CESM DATA MANAGEMENT & DISTRIBUTION PLAN

The [Community Earth System Model \(CESM\) Data Management and Data Distribution Plan](#) documents the procedures for the storage and distribution of data associated with the CESM project.

← Background and Sponsors

← Release versions

← How to Acquire the Code

← Reporting Problems, Known Problems

← CESM data management and distribution

Software/Hardware Requirements

- Subversion client (version 1.4.2 or greater)
- Fortran and C compilers (recommend pgi, intel, or ibm xlf compilers)
- NetCDF library (recommend netcdf4.1.3 or later)
- MPI (MPI1 is adequate, Open MPI or MPICH seem to work on Linux clusters)

[Note: Other external libraries (ESMF, MCT, PIO) are included in CESM source code, and do not have to be separately installed.]

- CESM currently runs “out of the box” today on the following machines

- yellowstone – NCAR IBM
- titan – ORNL Cray XK6
- hopper – NERSC Cray XE6
- edison – NERSC Cray Cascade
- bluewaters – ORNL Cray XE6
- intrepid – ANL IBM Bluegene/P
- mira – ANL IBM Bluegene/Q
- janus – Univ Colorado HPC cluster
- pleiades – NASA SGI ICE cluster
- and a few others



Basic Work Flow

(or how to set up and run an experiment)

- **One-Time Setup Steps**



(A) Registration and Download

(B) Create an Input Data Root Directory

(C) Porting

- **Creating & Running a Case**

(1) Create a New Case

(2) Invoke cesm_setup

(3) Build the Executable

(4) Run the Model: Initial Run and Output Data Flow

(5) Run the Model: Continuation Run(s)

(A) Registration

- Go to CESM1.2 home page: <http://www.cesm.ucar.edu/models/cesm1.2/>

CESM1.2 PUBLIC RELEASE

ABOUT CESM 1.2

TO DO - general release description

CESM1.2 Release Notes includes What's New - Science, What's New - Software, Answer-Changing Features, Supported Machines, and Known Problems.

SCIENTIFIC VALIDATION

Scientific validation consists of a multi-decadal model run of the given component set at the target resolution, followed by scientific review of the model output diagnostics. All scientifically supported component sets are also accompanied by diagnostic and model output data.

CESM1.2 Scientifically Supported Model Configurations - CESM1.2 has the flexibility to configure cases with many different combinations of component models, grids, and models settings.

Validated CESM1.2 model results and diagnostics will be added to the site as they become available.

DIAGNOSTIC PACKAGES AND NAMING CONVENTIONS

- Experiments & Diagnostics - CESM1.2 experiment results and diagnostics will be added to the site as they become available.
- Post Processing Utilities
- Model File Naming Conventions
- Experiment Case Naming Conventions

MODEL DOCUMENTATION

CESM1.2

- Users Guide
- Machines, Resolutions, Connected sets
- Model Component NameLists
- ICASEROOT and Rts

Atmosphere Models

- Community Atmosphere Model (cam, cam50s1, waccm)
- Climatological Data Model (ccd)

Land Models

- Community Land Model (CLM)
- Climatological Data Model (ccd)

Sea Ice Models

- Community Ice Code (cice)
- Climatological Ice Model (cim)

Coupler

- CEM Coupler (CIC)

Ocean Models

- Parallel Ocean Program (poc, poc2)
- Climatological Sub-Ocean Data Model (ccsd)

Land Ice Models

- Community Ice Sheet Model (cism)

River Models

- River Transport Model (rtm)
- Climatological River Runoff Model (ccrd)

EXTERNAL LIBRARY DOCUMENTATION

- Parallel I/O Library (PIO)
- Model Coupling Toolkit (MCT)
- Earth System Modeling Framework (ESMF)

MODEL INPUT DATA

The input data necessary to run all supported component sets is made available from a public Subversion input data repository. Note that the inputdata repository has much more data in it than you need to run CESM1.2 — **DO NOT attempt to svn checkout the whole input data repository**. The CESM1.2 User's Guide explains how to obtain the subset of input data required for your needs.

PERFORMANCE AND LOAD BALANCING DATA

The timing table provides performance data that will continue to evolve due to changes in the model, machine hardware and input from the user community. For CESM1.2, please refer to the CESM1.1.1 Timing Table.

CESM PROJECT

The Community Earth System Model (CESM) is a fully-coupled, global climate model that provides state-of-the-art computer simulations of the Earth's past, present, and future climate states.

CESM is sponsored by the National Science Foundation (NSF) and the U.S. Department of Energy (DOE). Administration of the CESM is maintained by the Climate and Global Dynamics Division (CGD) at the National Center for Atmospheric Research (NCAR).

MODEL SOURCE CODE

Copyright and Terms of Use

All CESM source code is subject to the following [Copyright, Notice and Disclaimer](#).

CESM Release Versions

CESM X.Y.Z - CESM model release versions include three numbers separated by a dot (.) where

- X - corresponds to the major release number indicating significant science changes.
- Y - corresponds to the addition of new infrastructure and new science capabilities for targeted components.
- Z - corresponds to release bug fixes and maintenance updates.

Acquiring the Release Code

The source code for CESM releases is distributed through a public Subversion code repository. This code can be checked out using Subversion client software, such as the command tools or simply view the [latest version with a web browser](#).

A short registration is required to access the repository. After registering, you will receive an email containing a user name and password that is necessary to gain access to the repository.

Acquisition of the code is more fully described in the most recent version of the [CESM1.2 User's Guide](#).

REPORTING A PROBLEM

If you have any problems, please first read the User's Guide including the sections on FAQs and User Cases. Please also refer to the [CESM Bulletin Board](#) which is in place to facilitate communication within the CESM community. Finally, please also refer to the [Release Notes](#) entries that are provided with every release and release update. If questions or problems still exist, then please send an email to cesm-help@ucar.edu. Support questions will be answered as resources are available.

CESM SUPPORT POLICY

CESM Support Policy - November 2012

CESM DATA MANAGEMENT & DISTRIBUTION PLAN

The Community Earth System Model (CESM) Data Management and Distribution Plan documents the procedures for the storage and distribution of data associated with the CESM project.

- Right hand column has a link to the registration page, click on it

Community Earth System Model CESM

CESM1.0 Release User Registration

Required fields

Last Name:

First Name:

E-Mail:

Institution:

Purpose:

Valid special characters to use: `period, hyphen, apostrophe, forward slash, colon, comma`. No additional special characters are allowed.

(Maximum characters: 400)
You have characters left.

Have you used previous versions of CCSM/CESM? Yes No

Publications using previous versions of CCSM/CESM:

If you have used previous versions of CCSM/CESM, please provide publications you have using the code. Valid special characters to use: `period, hyphen, apostrophe, forward slash, colon, comma`. No additional special characters are allowed.

(Maximum characters: 600)
You have characters left.

Copyright and Terms of Use

The Community Earth System Model (CESM) was developed in cooperation with the National Science Foundation (NSF), the Department of Energy (DOE), the National Aeronautics and Space Administration (NASA), the University Corporation for Atmospheric Research (UCAR) and the National Center for Atmospheric Research (NCAR). Except for the segregable components listed in the copyright, CESM is public domain software. There are third party tools and libraries that are embedded and they are subject to their own copyright notices and terms.

Please read the [Copyright and Terms of Use on the CESM1.0 release home page](#).

Access to the Model

Once you agree to the Copyright and Terms of Use and submit your user information, you will be contacted via email with a subversion repository user name and password. This user name and password will allow you to access the source code.

Agree to Terms* Yes No

- Register -- you will be emailed a username and password

(A) Download the Source Code

- Code and input datasets are in a subversion repository (*)


https://svn-ccsm-release.cgd.ucar.edu/model_versions

- List the versions available on the CESM repository

```
svn list https://svn-ccsm-release.cgd.ucar.edu/model_versions
```

- Check out a working copy from the repository (“Download code”)


```
svn co https://svn-ccsm-release.cgd.ucar.edu/model_versions/cesm1_2_0
```

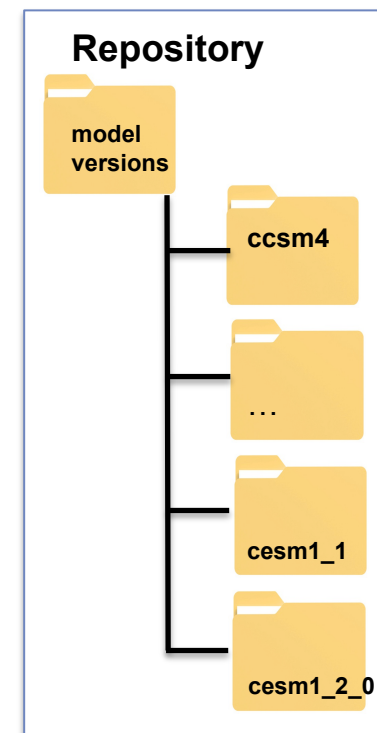

(*) You can get subversion at <http://subversion.apache.org/>



(A) Overview of Directories (after initial model download)

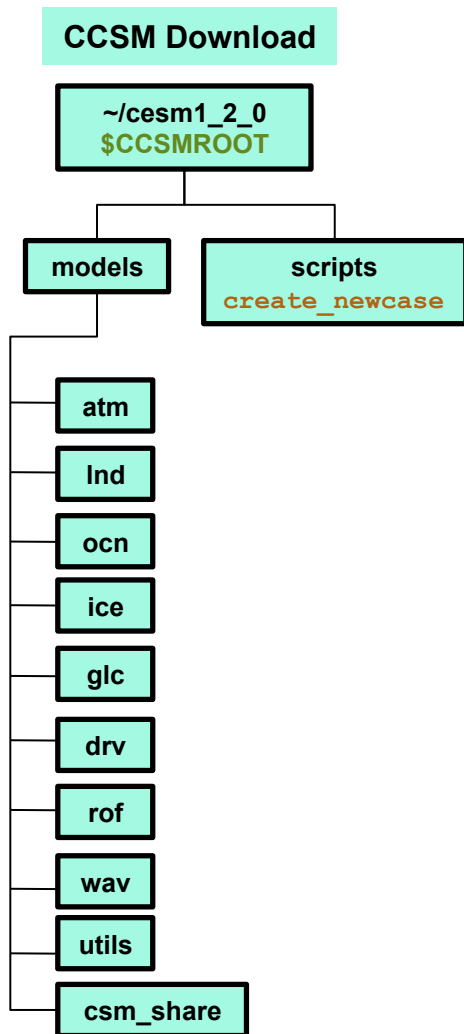

Basic Work Flow

(or how to set up and run an experiment)

- **One-Time Setup Steps**

- (A) Registration and Download



- (B) Create an Input Data Root Directory

- (C) Porting

- **Creating & Running a Case**

- (1) Create a New Case

- (2) Invoke `cesm_setup`

- (3) Build the Executable

- (4) Run the Model: Initial Run and Output Data Flow

- (5) Run the Model: Continuation Run(s)


(B) Create an Inputdata Root Directory

- The inputdata area contains all input data required to run the model
 - Location specified in the scripts by the **\$DIN_LOC_ROOT_CSMDATA** variable in file `env_run.xml`
- **On supported machines** - populated inputdata directory already exists
- **On non-supported machines** - need to create inputdata root directory
 - Ideally directory is shared by a group of users to save disc space
 - Initially inputdata directory is empty – data is added on an as-needed basis
- The script **check_input_data** is used to download input data
 - Checks if necessary data is available in inputdata directory
 - Downloads **only** the data needed for a particular run (more later)
 - Puts the data in the proper subdirectories of the input data directory tree and creates the proper subdirectories if necessary
- **Do NOT download input data manually** (ie. by using `svn co`)

(B) Overview of Directories (+ inputdata directory)

INPUTDATA Directory

/glade/p/cesm/cseg/inputdata
\$DIN_LOC_ROOT

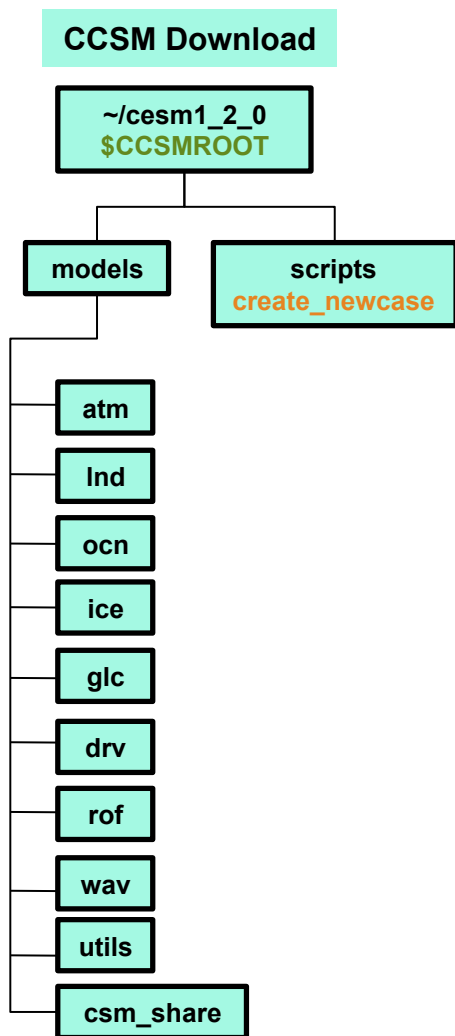

Basic Work Flow

(or how to set up and run an experiment)

- **One-Time Setup Steps**

- (A) Registration and Download

- (B) Create an Input Data Root Directory



- (C) Porting

- **Creating & Running a Case**

- (1) Create a New Case

- (2) Invoke `cesm_setup`

- (3) Build the Executable

- (4) Run the Model: Initial Run and Output Data Flow

- (5) Run the Model: Continuation Run(s)

(C) Porting

- Porting details are outside scope of tutorial –see User's Guide on web and tutorial Appendix
- On supported machines - no porting is necessary
- On new machines – porting will need to be done

Work Flow: Super Quick Start

These unix commands built and ran the model on a supported machine: "yellowstone"

```
# go to root directory of source code download
cd /path_to_source_code_download/cesm1_2_0

# go into scripts subdirectory
cd scripts

# (1) create a new case in the directory "cases" in your home directory
./create_newcase -case ~/cases/case01 -res f19_g16 -compset B_1850 -mach yellowstone

# go into the case you just created in the last step
cd ~/cases/case01/

# (2) invoke cesm_setup
./cesm_setup

# (3) build the executable
./case01.build

# (4) submit an initial (startup) run to the batch queue
./case01.submit
```

Basic Work Flow

(or how to set up and run an experiment)

- **One-Time Setup Steps**

- (A) Registration and Download

- (B) Create an Input Data Root Directory

- (C) Porting

- **Creating & Running a Case**



- (1) Create a New Case

- (2) Invoke `cesm_setup`

- (3) Build the Executable

- (4) Run the Model: Initial Run and Output Data Flow

- (5) Run the Model: Continuation Run(s)

Work Flow: Super Quick Start

These unix commands built and ran the model on a supported machine: "yellowstone"

```
# go to root directory of source code download
cd /path_to_source_code_download/cesm1_2_0

# go into scripts subdirectory
cd scripts

# (1) create a new case in the directory "cases" in your home directory
./create_newcase -case ~/cases/case01 -res f19_g16 -compset B_1850 -mach yellowstone

# go into the case you just created in the last step
cd ~/cases/case01/

# (2) invoke cesm_setup
./cesm_setup

# (3) build the executable
./case01.build


# (4) submit an initial run to the batch queue
./cases01.submit
```


(1) Create a New Case

- Go to the scripts directory: `.../cesm1_2_0/scripts/`
- Scripts are a combination of csh, perl, sh, and xml
- `create_newcase` is the tool that generates a new case

```
cd .../cesm1_2_0/scripts/

drwxr-sr-x 5 jshollen cseg 131072 May  7 13:53 .
drwxr-sr-x 6 jshollen cseg 131072 May  7 13:53 ..
drwxr-sr-x 8 jshollen cseg 131072 May  7 13:53 ccsm_utils
-rw-r--r-- 1 jshollen cseg 581940 May  7 13:53 ChangeLog
-rwxr-xr-x 1 jshollen cseg  19229 May  7 13:53 create_clone
-rwxr-xr-x 1 jshollen cseg  81134 May  7 13:53 create_newcase
-rwxr-xr-x 1 jshollen cseg  54590 May  7 13:53 create_test
drwxr-sr-x 5 jshollen cseg 131072 May  7 13:53 doc
-rwxr-xr-x 1 jshollen cseg   1255 May  7 13:53 link_dirtree
-rwxr-xr-x 1 jshollen cseg  12701 May  7 13:53 query_tests
-rw-r--r-- 1 jshollen cseg   2345 May  7 13:53 README
-rw-r--r-- 1 jshollen cseg   1113 May  7 13:53 sample_pes_file.xml
drwxr-sr-x 6 jshollen cseg 131072 May  7 13:53 .svn
-rw-r--r-- 1 jshollen cseg    203 May  7 13:53 SVN_EXTERNAL_DIRECTORIES
```



create_newcase

(1) About create_newcase

- `./create_newcase -help` lists all the available options
- Most often only four options are used: `case`, `compset`, `res`, and `mach`

```
cd ../cesml_2_0/scripts/  
./create_newcase -help
```

SYNOPSIS

```
create_newcase [options]
```

OPTIONS

User supplied values are denoted in angle brackets (<>). Any value that contains white-space must be quoted. Long option names may be supplied with either single or double leading dashes. A consequence of this is that single letter options may NOT be bundled.

<code>-case <name></code>	Specifies the case name (required).
<code>-compset <name></code>	Specify a CESM compset (required).
<code>-res <name></code>	Specify a CESM grid resolution (required).
<code>-mach <name></code>	Specify a CESM machine (required).
<code>-compiler <name></code>	Specify a compiler for the target machine (optional) default: default compiler for the target machine
<code>-mpilib <name></code>	Specify a mpi library for the target machine (optional) default: default mpi library for the target machine allowed: openmpi, mpich, ibm, mpi-serial, etc redundant with <code>_M</code> confopts setting
<code>-mach_dir <path></code>	Specify the locations of the Machines directory (optional). default: <code>/glade/p/cesm/cseg/collections/cesml_2_0_beta08/scripts/ccsm_utils/Machines</code>
<code>-pecount <name></code>	Value of S,M,L,X1,X2 (optional). default: M, partially redundant with confopts <code>_P</code>
<code>-pes_file <name></code>	Full pathname of pes file to use (will overwrite default settings) (optional). See <code>sample_pes_file.xml</code> for an example.
<code>-user_compset</code>	Long name for new user compset file to use (optional) This assumes that all of the compset settings in the long name have been defined.
<code>-grid_file <name></code>	Full pathname of grid file to use (optional) See <code>sample_grid_file.xml</code> for an example.
<code>-help [or -h]</code>	Note that compset components must support the new grid. Print usage to STDOUT (optional).
<code>-list <type></code>	Only list valid values, type can be [compsets, grids, machines] (optional).

...

(1) About create_newcase

The command `create_newcase` has **4 required arguments**.

```
./create_newcase -case ~/cases/case01 -res f19_g16 \  
-compset B_1850 -mach yellowstone
```

- “case” is the name and location of the case being created
 - ~/cases/case01
- “res” specifies the model resolutions (or grid)
 - Each model resolution can be specified by its alias, short name and long name.
 - Example of equivalent alias, short name and long name:
 - alias: f19_g16
 - short name: 1.9x2.5_gx1v6
 - long name = a%1.9x2.5_l%1.9x2.5_oi%gx1v6_r%r05_m%gx1v6_g%null_w%null

(1) About create_newcase

- **“compset” specifies the “component set”**
 - component set specifies component models, forcing scenarios and physics options for those models
 - Each model compset can be specified by its alias, short name and long name.
Example of equivalent alias, short name and long name:
 - alias: B1850
 - short name: B_1850
 - long name = 1850_CAM4_CLM40%SP_CICE_POP2_RTM_SGLC_SWAV
- **“mach” specifies the machine that will be used.**
 - “supported” machines tested regularly, eg. yellowstone, titan, hopper, intrepid
 - “generic machines” provide a starting point for porting, eg. generic_ibm


(1) Valid Values for res, compset, and mach

Command line to list all the valid choices for grids, compsets and machines

```
./create_newcase -list <type>
```

with type can be [compsets, grids, machines]

MODEL DOCUMENTATION

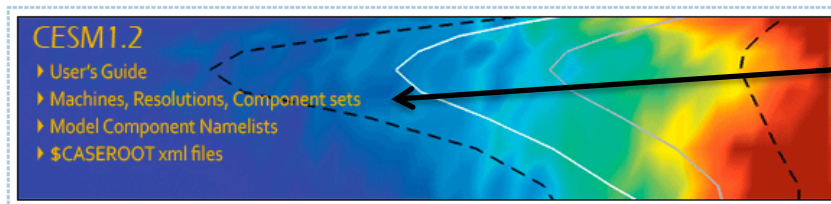


CESM1.2

- ▶ User's Guide
- ▶ Machines, Resolutions, Component sets
- ▶ Model Component Namelists
- ▶ \$CASEROOT xml files


List of valid values is also available from the CESM website

<http://www.cesm.ucar.edu/models/cesm1.2/>



Atmosphere Models

- ▶ Community Atmosphere Model (CAM5, CAM-CHEM, WACCM)
- ▶ Climatological Data Model (DATM)



Land Models

- ▶ Community Land Model (CLM4.0, CLM4.5)
- ▶ Climatological Data Model (DLND)




Sea Ice Models

- ▶ Community Ice CodE (ICE4)
- ▶ Climatological Ice Model (DICE)



Coupler

- ▶ CESM Coupler (CPL7)



Ocean Models

- ▶ Parallel Ocean Program (POP2, POP2-BGC)
- ▶ Climatological/Slab-Ocean Data Model (DOCN)



Land Ice Models

- ▶ Community Ice Sheet Model (Glimmer-CISM)







River Models

- ▶ River Transport Model (RTM)
- ▶ Climatological River Runoff Model (PROF)

More on CESM component sets

Plug and play of components (e.g. atm) with different component models (e.g. cam, datm, etc).

*subsets of the B, I, E, and F compsets include the full CISM1 (land ice) model

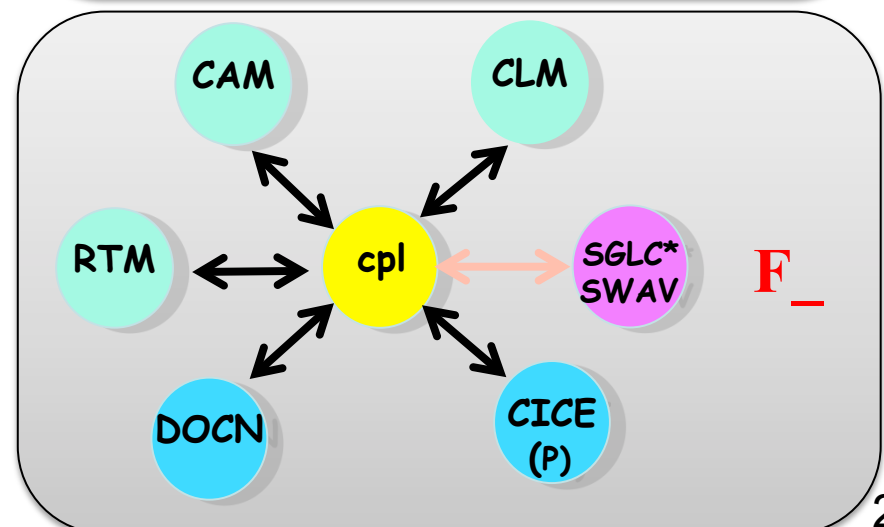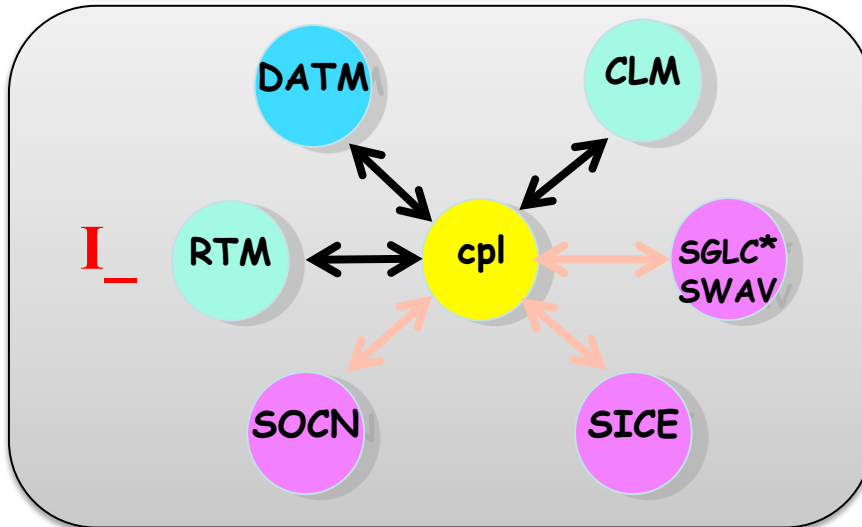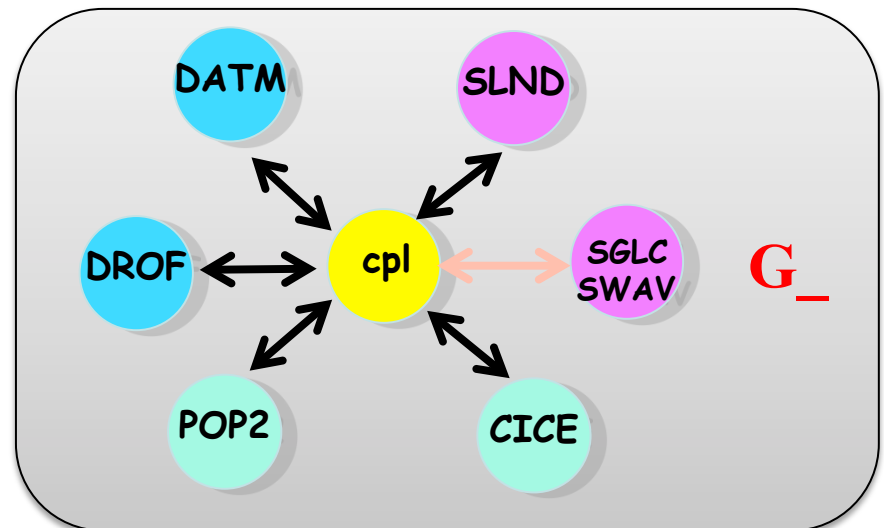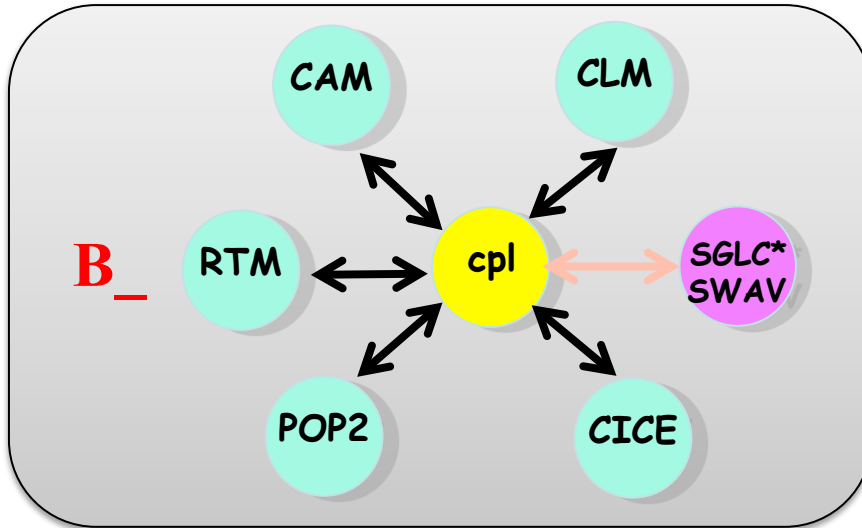

(1) Result of running create_newcase

```
./create_newcase -case ~/cases/case01 -res f19_g16 \  
-compset B_1850 -mach yellowstone
```

```
-----  
For a list of potential issues in the current tag, please point your web browser to:  
https://svn-ccsm-models.cgd.ucar.edu/cesml/known\_problems/  
-----
```

```
grid longname is f19_g16  
Component set: longname (shortname) (alias)  
1850_CAM4_CLM40%SP_CICE_POP2_RTM_SGLC_SWAV (B_1850) (B1850)  
Component set Description:  
CAM: CLM: RTM: CICE: POP2: SGLC: SWAV: pre-industrial: cam4 physics:  
clm4.0 physics: clm4.0 specified phenology: prognostic cice: POP2 default:
```

```
Grid:  
a%1.9x2.5_l%1.9x2.5_oi%gx1v6_r%r05_m%gx1v6_g%null_w%null (1.9x2.5_gx1v6)  
ATM_GRID = 1.9x2.5 NX_ATM=144 NY_ATM=96  
LND_GRID = 1.9x2.5 NX_LND=144 NX_LND=96  
...
```

```
Non-Default Options:  
ATM_NCPL: 48  
BUDGETS: TRUE  
CAM_CONFIG_OPTS: -phys cam4  
...
```

```
The PE layout for this case match these options:
```

```
GRID = a%1.9x2.5_l%1.9x2.5_oi%gx1  
CCSM_LCOMPSET = CAM.+CLM.+CICE.+POP  
MACH = yellowstone  
Creating /glade/u/home/hannay/cases/case01  
Created /glade/u/home/hannay/cases/case01/env_case.xml  
Created /glade/u/home/hannay/cases/case01/env_mach_pes.xml  
Created /glade/u/home/hannay/cases/case01/env_build.xml  
Created /glade/u/home/hannay/cases/case01/env_run.xml  
Locking file /glade/u/home/hannay/cases/case01/env_case.xml  
Successfully created the case for yellowstone
```

```
Locking file ~/cases/case01/env_case.xml  
Successfully created the case for yellowstone
```

compset info

grid info

non default
options

case location


Success!



(1) Overview of Directories (after create_newcase)

INPUTDATA Directory

/glade/p/cesm/cseg/inputdata
\$DIN_LOC_ROOT

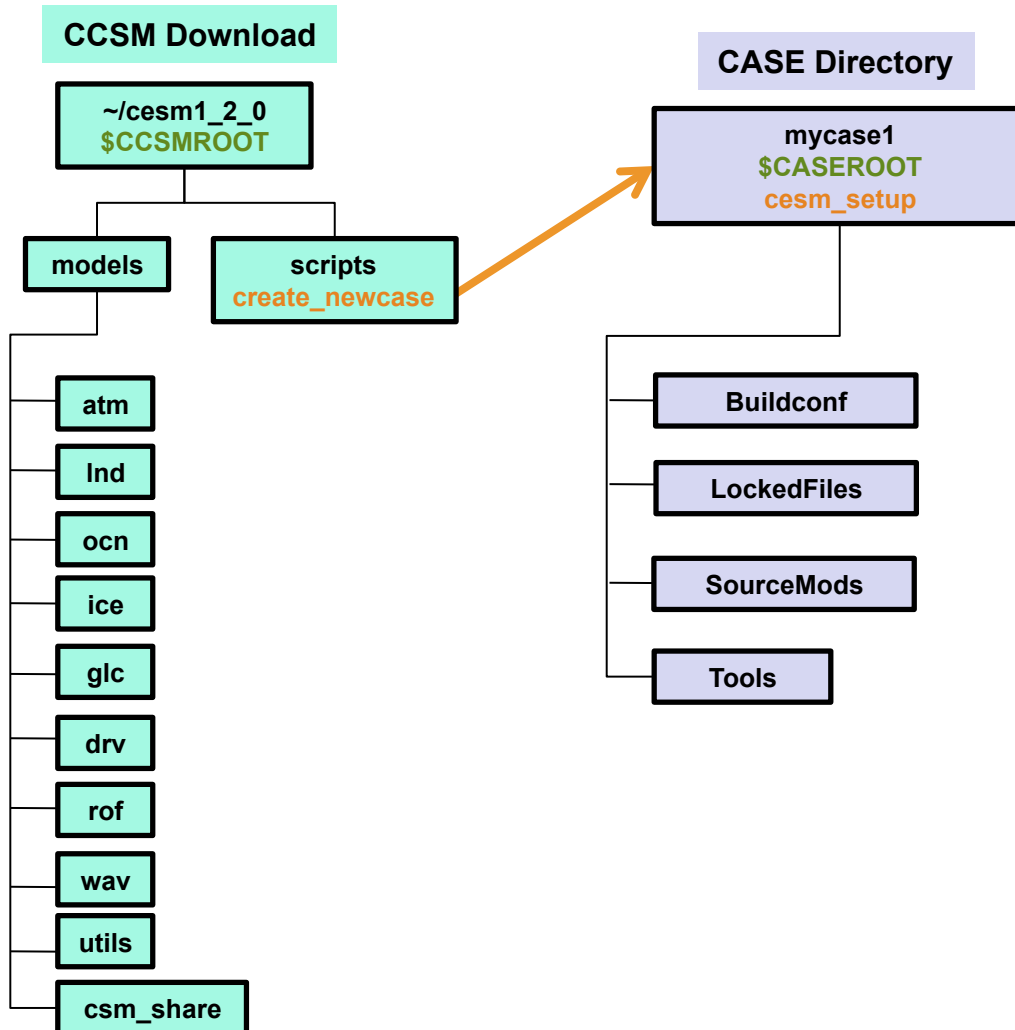

(1) Case directory after running create_newcase

- **SourceMods** - directory for case specific code modifications
- **cesm_setup** - script used in the next step, step (2)
- **env_*.xml** - contains xml/environment variables (more on this later)
- **xmlchange** - script that changes xml (env) variable values

```
-rw-rw-r-- 1 hannay ncar 1500 Jun 10 09:03 README.case
-rw-r--r-- 1 hannay ncar 2345 Jun 10 09:03 README.science_support
-rwxr-xr-x 1 hannay cseg 14495 Jun 10 09:03 cesm_setup
-rwxr-xr-x 1 hannay cseg 10126 Jun 10 09:03 check_input_data
-rwxr-xr-x 1 hannay cseg 15390 Jun 10 09:03 archive_metadata.sh
-rwxr-xr-x 1 hannay cseg 837 Jun 10 09:03 check_case
-rwxr-xr-x 1 hannay cseg 3672 Jun 10 09:03 create_production_test
-rwxr-xr-x 1 hannay cseg 12569 Jun 10 09:03 xmlchange
-rwxr-xr-x 1 hannay cseg 10503 Jun 10 09:03 xmlquery
drwxrwxr-x 3 hannay ncar 16384 Jun 10 09:03 Tools
-rwxr-xr-x 1 hannay ncar 13233 Jun 10 09:03 case01.build
-rwxr-xr-x 1 hannay ncar 1048 Jun 10 09:03 case01.clean_build
-rwxr-xr-x 1 hannay ncar 608 Jun 10 09:03 case01.submit
-rwxrwxr-x 1 hannay ncar 918 Jun 10 09:03 case01.l_archive
-rwxr-xr-x 1 hannay ncar 2127 Jun 10 09:03 preview_namelists
drwxrwxr-x 2 hannay ncar 16384 Jun 10 09:03 Buildconf
drwxrwxr-x 11 hannay ncar 16384 Jun 10 09:03 SourceMods
-rwxr-xr-x 1 hannay ncar 2653 Jun 10 09:03 env_mach_specific
-rw-r--r-- 1 hannay ncar 301 Jun 10 09:03 Depends.intel
-rw-rw-r-- 1 hannay ncar 4421 Jun 10 09:03 env_case.xml
-rw-rw-r-- 1 hannay ncar 6998 Jun 10 09:03 env_mach_pes.xml
-rw-rw-r-- 1 hannay ncar 10849 Jun 10 09:03 env_build.xml
-rw-rw-r-- 1 hannay ncar 23197 Jun 10 09:03 env_run.xml
drwxrwxr-x 2 hannay ncar 16384 Jun 10 09:03 LockedFiles
-rw-rw-r-- 1 hannay ncar 135 Jun 10 09:03 CaseStatus
```

cesm_setup

xmlchange

SourceMods

env_*.xml files

About .xml Files: Format & Variables

- Contains variables used by scripts -- some can be changed by the user
- Here's a snippet of the `env_run.xml` file

```
<!--"sets the run length in conjunction with STOP_N and STOP_DATE, valid values: none,never,nst
eps,nstep,nseconds,nsecond,nminutes,nminute,nhours,nhour,ndays,nday,nmonths,nmonth,nyears,nyea
r,date,ifdays0,end (char) " -->
<entry id="STOP_OPTION" value="ndays" />

<!--"sets the run length in conjunction with STOP_OPTION and STOP_DATE (integer) " -->
<entry id="STOP_N" value="5" />

<!--"logical to turn on short term archiving, valid values: TRUE,FALSE (logical) " -->
<entry id="DOUT_S" value="TRUE" />

<!--"local short term archiving root directory (char) " -->
<entry id="DOUT_S_ROOT" value="/ptmp/$CCSMUSER/archive/$CASE" />
```

- “id” - variable name
- “value” – variable value
- <!-- text --> description above the entry
- To modify a variable in an xml file – use `xmlchange`
 - > `xmlchange -help`
 - > `xmlchange STOP_N=20`(Can edit `env_*.xml` file manually -- but be careful about introducing formatting errors)

About .xml Files: How They Change the Build and Run

- **env_case.xml**
 - Set by create_newcase and cannot be modified
- **env_mach_pes.xml**
 - Specifies layout of components on hardware processors
 - Use this to tune performance - **scientific results do not depend on component/processor layout**
- **env_build.xml**
 - Specifies build information including component resolutions and component configuration options
- **Macros.***
 - Specifies Makefile compilation variables; created after cesm_setup
- **env_mach_specific**
 - Sets modules and paths to libraries (e.g. MPI)
 - Can change compiler options, libraries, etc.
 - Part of porting is to set variables here
- **env_run.xml**
 - Sets run time information (such as length of run, frequency of restarts, output of coupler diagnostics, and short-term and long-term archiving.)
 - User interacts with this file most frequently

Basic Work Flow

(or how to set up and run an experiment)

- **One-Time Setup Steps**

- (A) Registration and Download

- (B) Create an Input Data Root Directory

- (C) Porting

- **Creating & Running a Case**

- (1) Create a New Case

-  (2) Invoke cesm_setup

- (3) Build the Executable

- (4) Run the Model: Initial Run and Output Data Flow

- (5) Run the Model: Continuation Run(s)

Work Flow: Super Quick Start

These unix commands built and ran the model on a supported machine: "yellowstone"

```
# go to root directory of source code download
cd /path_to_source_code_download/cesm1_2_0

# go into scripts subdirectory
cd scripts

# (1) create a new case in the directory "cases" in your home directory
./create_newcase -case ~/cases/case01 -res f19_g16 -compset B_1850 -mach yellowstone

# go into the case you just created in the last step
cd ~/cases/case01/

# (2) invoke cesm_setup
./cesm_setup

# (3) build the executable
./case01.build

# (4) submit an initial run to the batch queue
./case01.submit
```

(2) The command “cesm_setup”

The command: `cesm_setup`

- Creates the **Macros** file if it does not exist.
- Creates the namelist modification files `user_nl_XXX`, (where XXX denotes the set of components targeted for the specific case)
- Creates the case scripts: `*.build`, `*.run` and `*.l_archive`
- Creates the **directory CaseDocs**:
 - contains all the a documentation copy of the component namelists.
 - *This is for reference only and files in this directory SHOULD NOT BE EDITED.*

(2) About cesm_setup

`./cesm_setup -help`

SYNOPSIS

Creates Macros file for target machine if it does not exist
Creates user_nl_xxx files for target components (and number of instances) if they do not exist
Creates batch run script (case.run) for target machine

USAGE

`cesm_setup [options]`

OPTIONS

<code>-help [or -h]</code>	Print usage to STDOUT.
<code>-clean</code>	Removes the batch run script for target machines Macros and user_nl_xxx files are never removed by cesm_setup - you must remove them manually

(2) Calling cesm_setup

- `cd ~cases/case01`
- `./cesm_setup`

```
Creating Macros file for yellowstone
/glade/p/cesm/cseg/collections/cesm1_2_beta08/scripts/ccsm_utils/Machines/
config_compilers.xml intel yellowstone
Creating batch script case01.run
Locking file env_mach_pes.xml
Creating user_nl_xxx files for components and cpl
Running preview_namelist script
  infile is /glade/u/home/hannay/cases/case01/Buildconf/cplconf/cesm_namelist
CAM writing dry deposition namelist to drv_flds_in
CAM writing namelist to atm_in
CLM configure done.
CLM adding use_case 1850_control defaults for var sim_year with val 1850
CLM adding use_case 1850_control defaults for var sim_year_range with val
constant
CLM adding use_case 1850_control defaults for var use_case_desc with val
Conditions to simulate 1850 land-use
CICE configure done.
POP2 build-namelist: ocn_grid is gx1v6
POP2 build-namelist: ocn_tracer_modules are iage
See ./CaseDoc for component namelists
If an old case build already exists, might want to run case01.clean_build
before building
```

Create Macros


Create run script

Create user_nl_xxx

(2) Overview of Directories (after cesm_setup)

INPUTDATA Directory

/glade/p/cesm/cseg/inputdata
\$DIN_LOC_ROOT

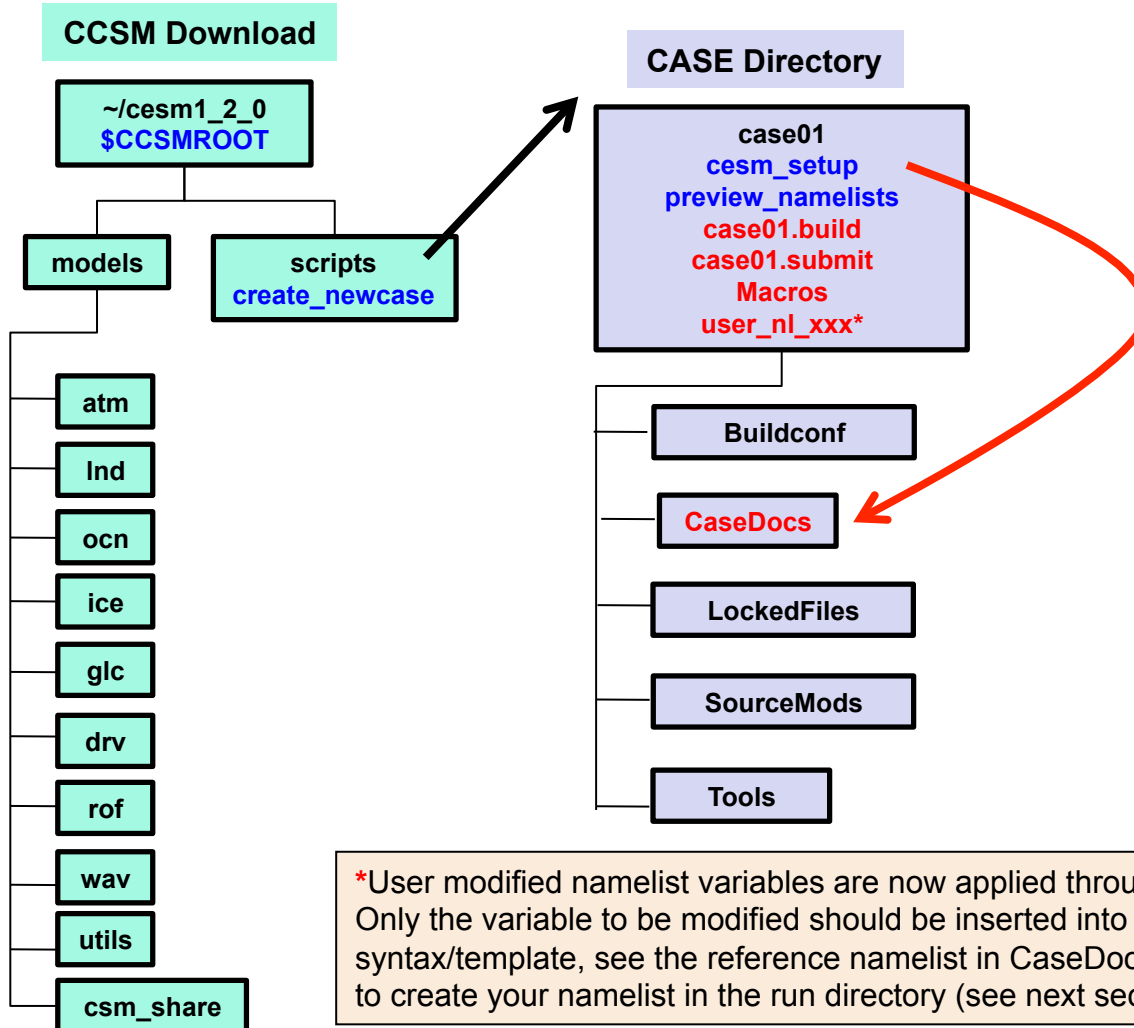

*User modified namelist variables are now applied through the `user_nl_XXX` files. Only the variable to be modified should be inserted into this file. To find the proper syntax/template, see the reference namelist in `CaseDocs`, or use “`preview_namelist`” to create your namelist in the run directory (see next sections).

Basic Work Flow

(or how to set up and run an experiment)

- **One-Time Setup Steps**

- (A) Registration and Download

- (B) Create an Input Data Root Directory

- (C) Porting

- **Creating & Running a Case**

- (1) Create a New Case

- (2) Invoke `cesm_setup`



- (3) Build the Executable

- (4) Run the Model: Initial Run and Output Data Flow

- (5) Run the Model: Continuation Run(s)

Work Flow: Super Quick Start

These unix commands built and ran the model on a supported machine: "yellowstone"

```
# go to root directory of source code download
cd /path_to_source_code_download/cesm1_2_0

# go into scripts subdirectory
cd scripts

# (1) create a new case in the directory "cases" in your home directory
./create_newcase -case ~/cases/case01 -res f19_g16 -compset B_1850 -mach yellowstone

# go into the case you just created in the last step
cd ~/cases/case01/

# (2) invoke cesm_setup
./cesm_setup

# (3) build the executable
./case01.build

# (4) submit an initial run to the batch queue
./case01.submit
```

(3) Build the Model

- Use the ***.build** script
- Modifications before build
 - Change env_build.xml values *before* running *.build
 - Introduce modified source code in SourceMods/ before building
- To redo build, run ***.clean_build** first
- **The *.build script**
 - Checks for missing input data
 - Creates directory for executable code and model namelist files
 - Locks env_build.xml
 - Builds the individual component libraries and model executable
- **If any inputdata is missing,**
 - Build aborts, but provides a list of missing files
 - Run **./check_input_data -export** to acquire missing data
 - This will use svn to put required data in the inputdata directory
 - Then re-run build script

(3) The *.build script

```
cases/case01>ls -l
total 432


<snippet>
drwxr-xr-x    6 userx  ncar      8192 May 13 17:12 Buildconf
drwxr-xr-x    2 userx  ncar      8192 May 13 17:12 LockedFiles
-rw-r--r--    1 userx  ncar    10687 May 13 14:32 Macros
drwxr-xr-x    2 userx  ncar      8192 May 13 14:32 README.science_support
-rw-r--r--    1 userx  ncar      66 May 13 14:32 README.case
drwxr-xr-x    9 userx  ncar      8192 May 13 14:32 SourceMods
drwxr-xr-x    4 userx  ncar      8192 May 13 14:32 Tools
-rwxr-xr-x    1 userx  ncar     9330 May 12 11:33 check_input_data
-rwxr-xr-x    1 userx  ncar    10092 May 12 11:33 cesm_setup
-rwxr-xr-x    1 userx  ncar     3085 May 12 11:33 create_production_test
-rw-r--r--    1 userx  ncar     4454 May 13 17:12 env_build.xml
-rw-r--r--    1 userx  ncar     5635 May 13 14:32 env_case.xml
-rw-r--r--    1 userx  ncar      614 May 13 17:12 env_derived
-rw-r--r--    1 userx  ncar     5916 May 13 17:12 env_mach_pes.xml
-rwxr-xr-x    1 userx  ncar     2199 May 13 14:32 env_mach_specific
-rw-r--r--    1 userx  ncar    10466 May 13 14:32 env_run.xml
-rwxrwxr-x    1 userx  ncar      574 May 13 17:12 case01.build
-rwxrwxr-x    1 userx  ncar      836 May 13 17:12 case01.clean_build
-rwxrwxr-x    1 userx  ncar      802 May 13 17:12 case01.l_archive
-rwxrwxr-x    1 userx  ncar     3938 May 13 17:12 case01.run
-rwxrwxr-x    1 userx  ncar      608 May 13 17:12 case01.submit
-rwxr-xr-x    1 userx  ncar    10388 May 12 11:33 xmlchange
<snippet>
```

The diagram consists of three yellow rectangular boxes on the right side of the terminal output, each with a red arrow pointing to a specific file in the list:

- The top box, labeled "check_input_data", has an arrow pointing to the file "check_input_data" in the terminal output.
- The middle box, labeled "env_build.xml", has an arrow pointing to the file "env_build.xml" in the terminal output.
- The bottom box, labeled ".build script", has an arrow pointing to the file "case01.build" in the terminal output.


(3) Modifying Source Code

- Code modified in `models/` will apply to all new cases created – A BAD IDEA
- Modified code in the `CASE SourceMods/` subdirectory applies to that case only
- Files in `SourceMods/` must be in proper subdirectory, eg. `pop2` code in `src.pop2`

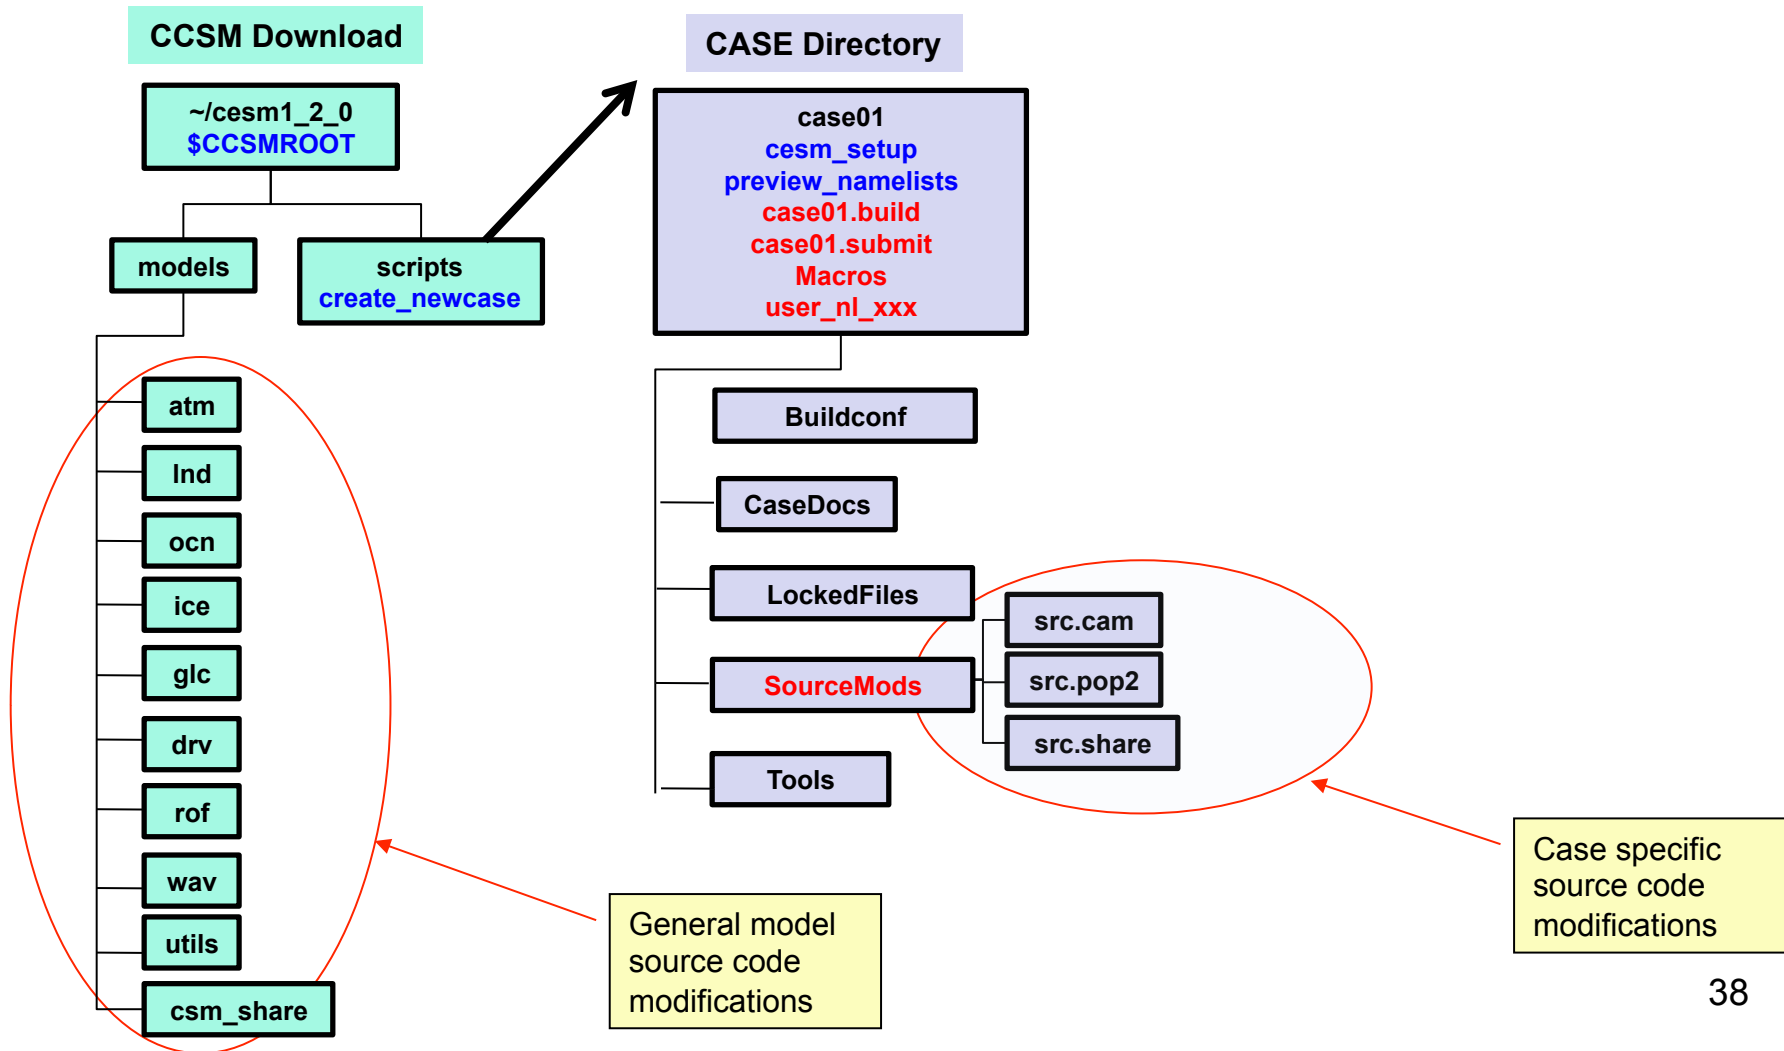


(3) Running the .build Script

- Checks for missing input data
- Aborts if any input data is missing
- Builds the component model libraries and executable by running the ***.buildexe.csh** scripts for each component

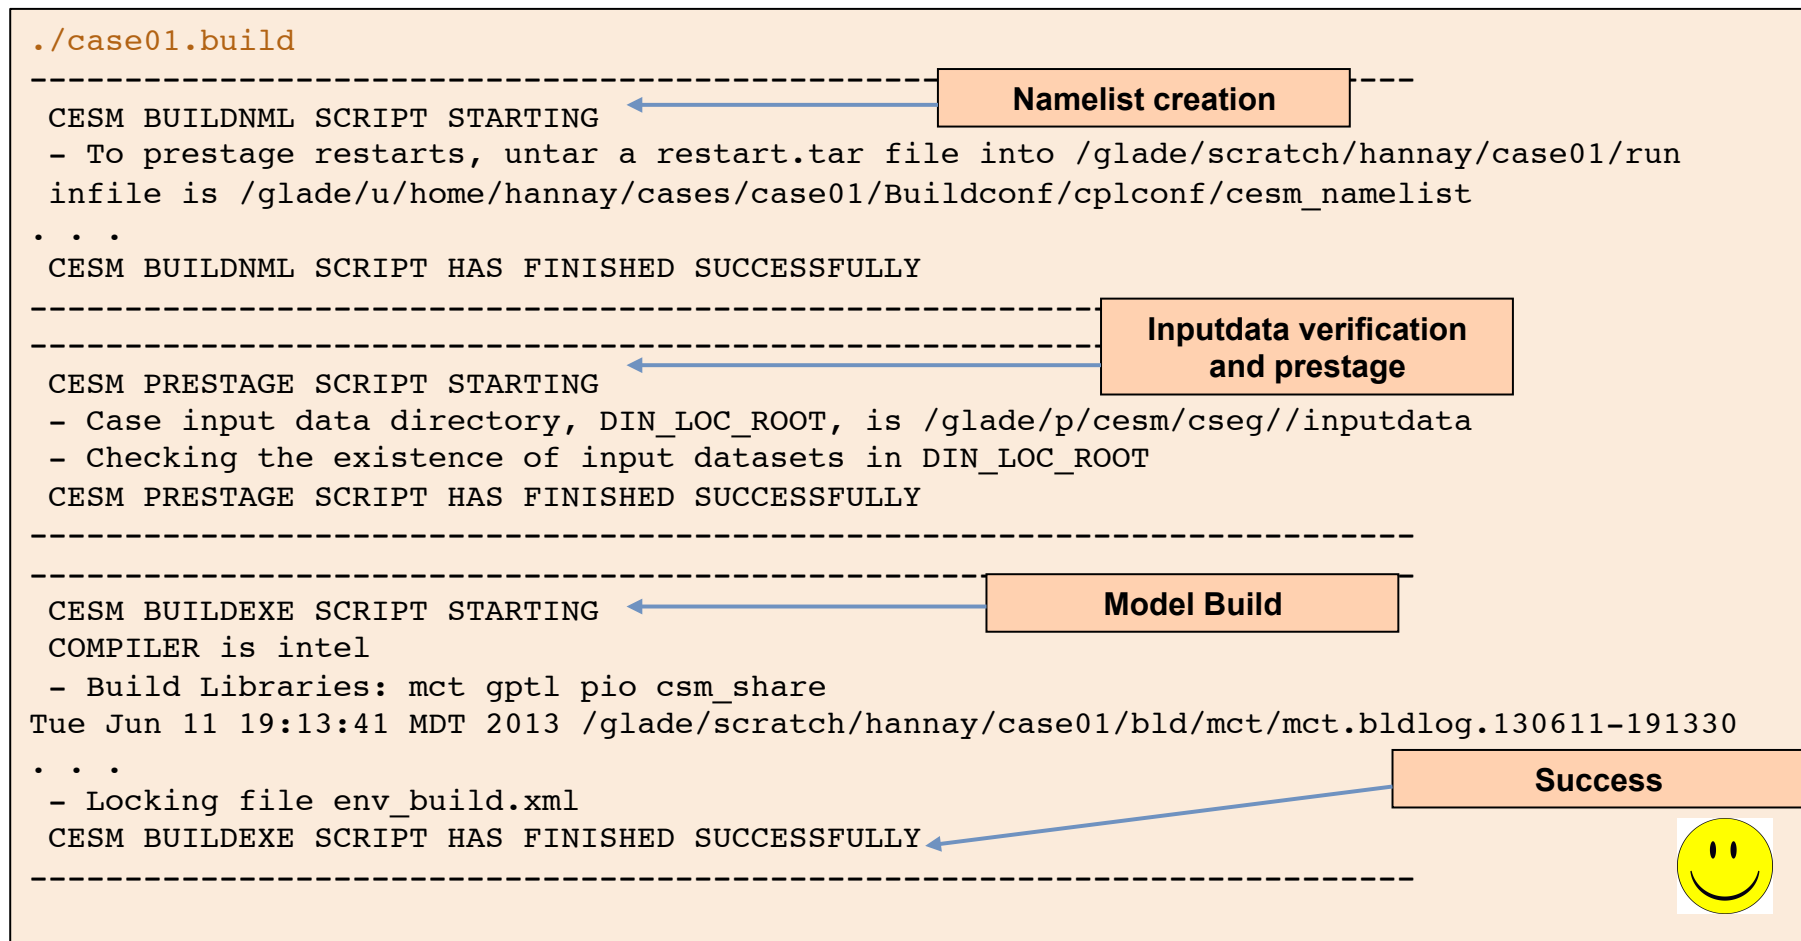

(3) Overview of Directories (after build)

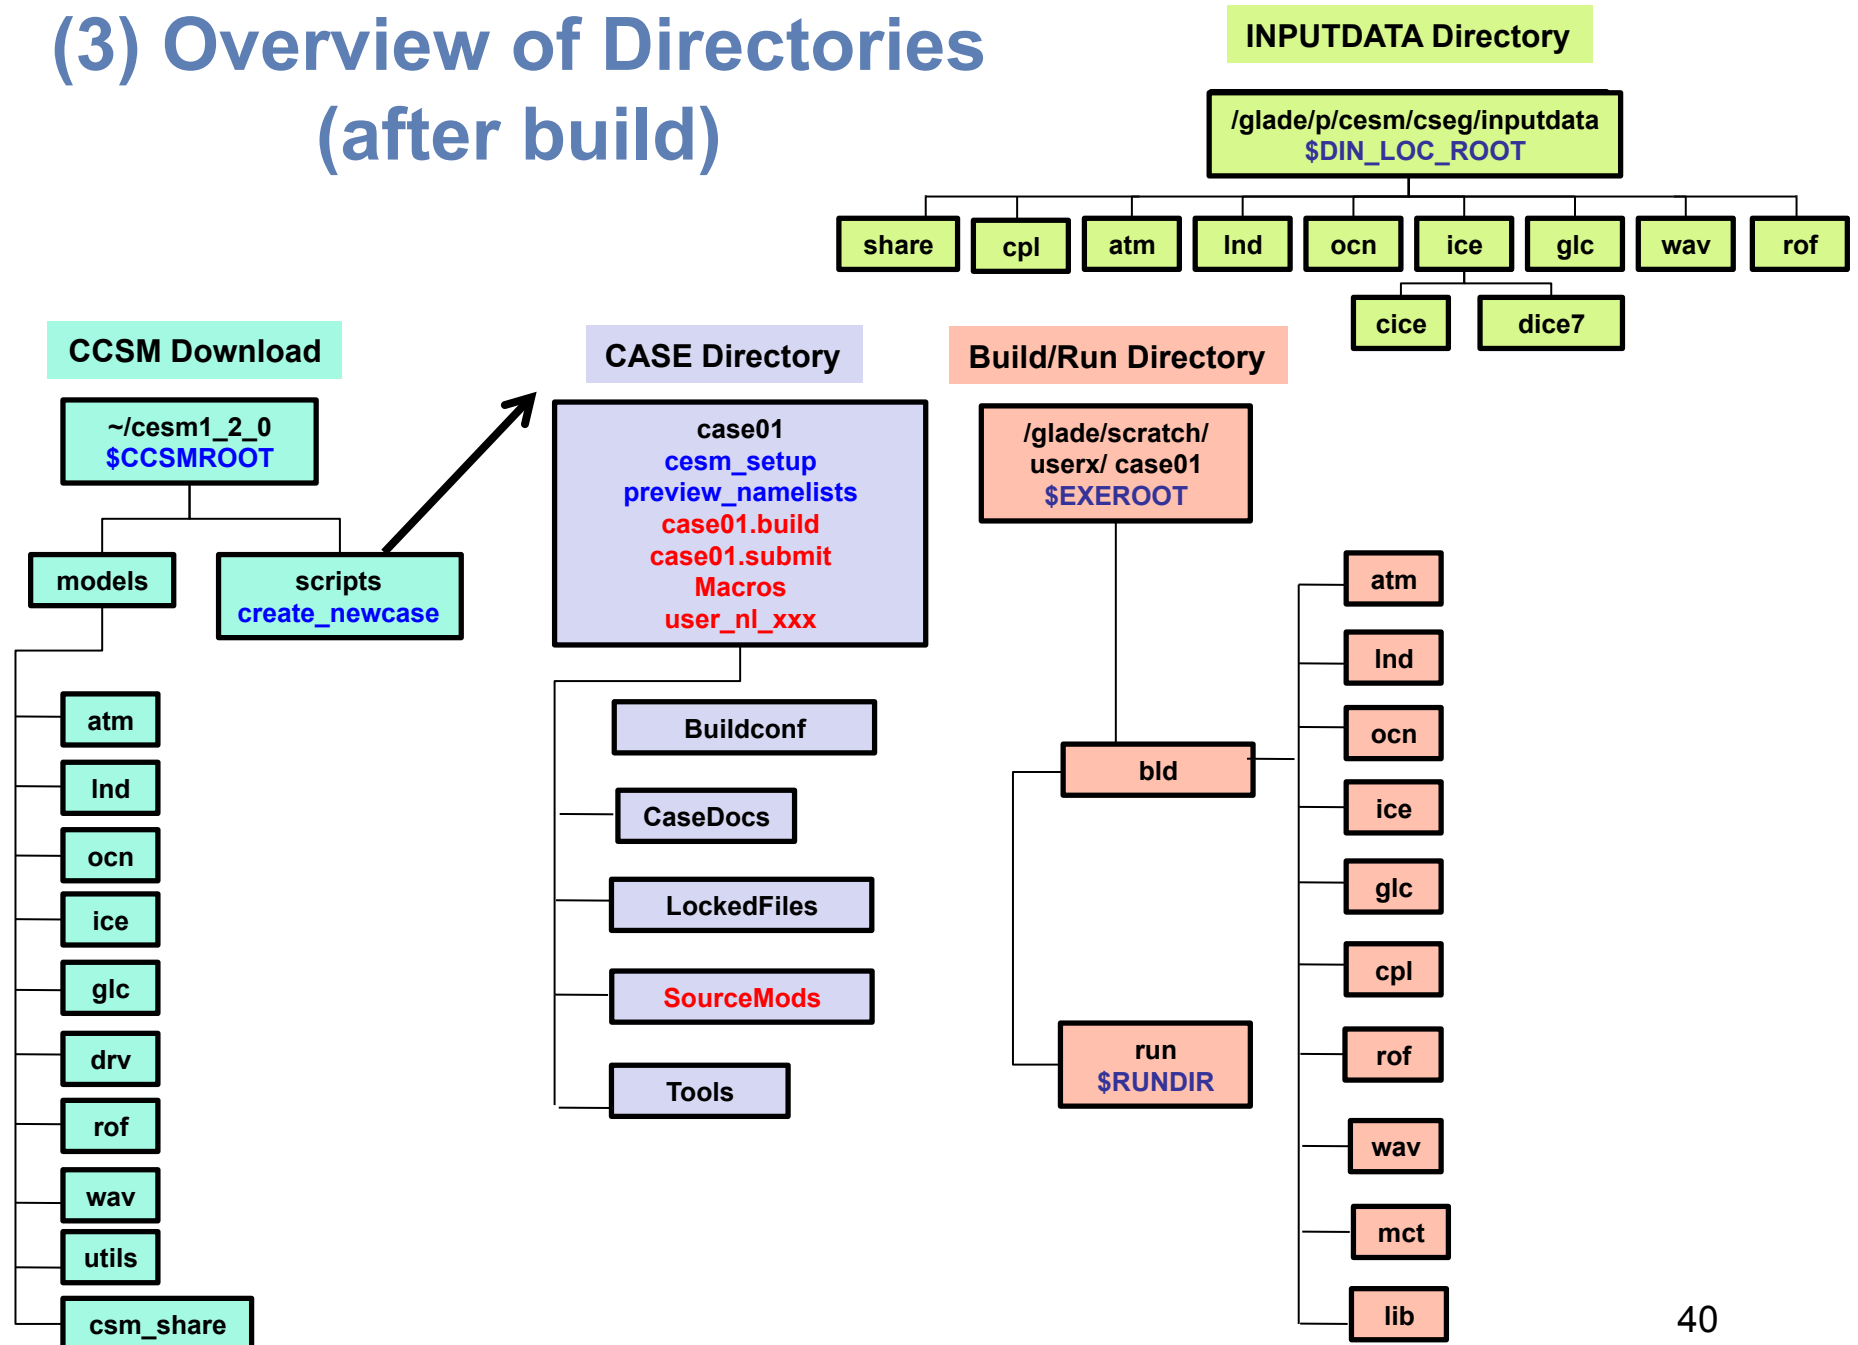

Basic Work Flow

(or how to set up and run an experiment)

- **One-Time Setup Steps**

- (A) Registration and Download

- (B) Create an Input Data Root Directory

- (C) Porting

- **Creating & Running a Case**

- (1) Create a New Case

- (2) Invoke `cesm_setup`

- (3) Build the Executable



- (4) Run the Model: Initial Run and Output Data Flow

- (5) Run the Model: Continuation Run(s)

Work Flow: Super Quick Start

These unix commands built and ran the model on a supported machine: "yellowstone"

```
# go to root directory of source code download
cd /path_to_source_code_download/cesm1_2_0

# go into scripts subdirectory
cd scripts

# (1) create a new case in the directory "cases" in your home directory
./create_newcase -case ~/cases/case01 -res f19_g16 -compset B_1850 -mach yellowstone

# go into the case you just created in the last step
cd ~/cases/case01/

# (2) invoke cesm_setup
./cesm_setup

# (3) build the executable
./case01.build

# (4) submit an initial run to the batch queue
./case01.submit
```

(4) Running the Model: Initial Run

- May want to edit `env_run.xml` file before running (e.g. change run length)
- May also want to modify component namelist settings
- Can change `env_run.xml` variables
- Or modify a namelist through `user_nl_XXX`
- The run script
 - Generates the namelist files in `$RUNDIR` (again)
 - Verifies existence of input datasets (again)
 - DOES NOT build (or re-build) the executable

`cases/case01> case01.submit`

```
cases/case01>case01.submit
check_case OK
Job <40597> is submitted to queue <regular>.
```

`cases/case01> bjobs`

```
cases/mycase1>bjobs
JOBID  USER  STAT  QUEUE   FROM_HOST  EXEC_HOST  JOB_NAME  SUBMIT_TIME
40597  userx  PEND  regular  yslogin1-ib  15*ys1358  case01    Jun 12 18:30
      .
      .
      .
```

(4) Output in Your CASE Directory

```
~/cases/case01 > ls -l
-rwxr-xr-x  1 hannay cseg 15390 May  7 13:53 archive_metadata.sh
drwxrwxr-x  8 hannay ncar 16384 Jun 12 21:29 Buildconf
-rwxr-xr-x  1 hannay ncar 13233 Jun 10 21:38 case01.build
-rwxr-xr-x  1 hannay ncar  1048 Jun 10 21:38 case01.clean_build
-rwxrwxr-x  1 hannay ncar   918 Jun 10 21:38 case01.l_archive
-rwxr-xr-x  1 hannay ncar 10270 Jun 12 21:28 case01.run
-rwxr-xr-x  1 hannay ncar   608 Jun 10 21:38 case01.submit
drwxrwxr-x  2 hannay ncar 16384 Jun 10 21:38 CaseDocs
-rw-rw-r--  1 hannay ncar   270 Jun 12 21:29 CaseStatus
-rwxr-xr-x  1 hannay cseg 14495 May  7 13:53 cesm_setup
-rw-rw-r--  1 hannay ncar     0 Jun 12 21:29 cesm.stderr.920879
-rw-rw-r--  1 hannay ncar  1300 Jun 12 21:29 cesm.stdout.920879
-rwxr-xr-x  1 hannay cseg   837 May  7 13:53 check_case
-rwxr-xr-x  1 hannay cseg 10126 May  7 13:53 check_input_data
-rw-rw-r--  1 hannay ncar 10924 Jun 12 21:29 env_build.xml
-rw-rw-r--  1 hannay ncar  4421 Jun 10 21:38 env_case.xml
-rw-rw-r--  1 hannay ncar   895 Jun 12 21:29 env_derived
-rw-rw-r--  1 hannay ncar  7003 Jun 10 21:38 env_mach_pes.xml
-rwxr-xr-x  1 hannay ncar  2653 Jun 10 21:38 env_mach_specific
-rw-rw-r--  1 hannay ncar 23197 Jun 10 21:38 env_run.xml
-rw-rw-r--  1 hannay ncar     9 Jun 12 21:29 hostfile
drwxrwxr-x  2 hannay ncar 16384 Jun 11 19:23 LockedFiles
drwxrwxr-x  3 hannay ncar 16384 Jun 11 19:23 logs
-rw-rw-r--  1 hannay ncar   954 Jun 10 21:38 Macros
-rwxr-xr-x  1 hannay ncar  2127 Jun 10 21:38 preview_namelists
-rw-rw-r--  1 hannay ncar  1500 Jun 10 21:37 README.case
-rw-r--r--  1 hannay ncar  2345 Jun 10 21:37 README.science_support
drwxrwxr-x 11 hannay ncar 16384 Jun 10 21:38 SourceMods
drwxrwxr-x  2 hannay ncar 16384 Jun 12 21:31 timing
drwxrwxr-x  3 hannay ncar 16384 Jun 10 21:38 Tools
-rw-r--r--  1 hannay ncar   115 Jun 10 21:38 user_nl_cam
-rw-r--r--  1 hannay ncar   367 Jun 10 21:38 user_nl_cice
-rw-r--r--  1 hannay ncar  1040 Jun 10 21:38 user_nl_clm
-rw-r--r--  1 hannay ncar  2284 Jun 10 21:38 user_nl_cpl
-rw-r--r--  1 hannay ncar  2949 Jun 10 21:38 user_nl_pop2
-rw-r--r--  1 hannay ncar   573 Jun 10 21:38 user_nl_rtm
-rwxr-xr-x  1 hannay cseg 12569 May  7 13:53 xmlchange
-rwxr-xr-x  1 hannay cseg 10503 May  7 13:53 xmlquery
```

stout/err

Log files

Timing files

(4) Output in Your CASE Directory

```
~/cases/case01/logs > ls -l
-rw-rw-r-- 1 hannay ncar 37047 Jun 12 21:31 atm.log.130612-212912.gz
drwxrwxr-x 2 hannay ncar 16384 Jun 11 19:23 bld
-rw-rw-r-- 1 hannay ncar 24235 Jun 12 21:31 cesm.log.130612-212912.gz
-rw-rw-r-- 1 hannay ncar  6696 Jun 12 21:31 cpl.log.130612-212912.gz
-rw-rw-r-- 1 hannay ncar 17074 Jun 12 21:31 ice.log.130612-212912.gz
-rw-rw-r-- 1 hannay ncar  7810 Jun 12 21:31 lnd.log.130612-212912.gz
-rw-rw-r-- 1 hannay ncar 20175 Jun 12 21:31 ocn.log.130612-212912.gz
-rw-rw-r-- 1 hannay ncar  1772 Jun 12 21:31 rof.log.130612-212912.gz
```

Log files



A job completed successfully if **“SUCCESSFUL TERMINATION OF CPL7-CCSM”** appears near end of the cpl.log file

```
~/cases/case01/timing > ls -l
-rw-rw-r-- 1 hannay ncar 7898 Jun 12 21:31 ccsm_timing.case01.130612-212912
-rw-rw-r-- 1 hannay ncar 9844 Jun 12 21:31 ccsm_timing_stats.
130612-212912.gz
```

Timing files



Timing files tells about **model throughput** (how many model years per day) and **model cost** (pe-hrs per simulated years).


Each time a job is run a new timing file is created in this directory.

(4) Output in Short Term Archiving Directory

- Output data is originally created in ***\$RUNDIR***
- When the run ends, output data is moved into a short term archiving directory, ***\$DOUT_S_ROOT***
 - Cleans up the ***\$RUNDIR*** directory
 - Migrates output data away from a possibly volatile ***\$RUNDIR***
 - Gathers data for the long term archive script

```
cases/case01>echo $DOUT_S_ROOT
/glade/scratch/userx/archive/case01
cases/case01>ls -l $DOUT_S_ROOT
total 3072
drwxr-xr-x 12 shields ncar 131072 Jun 12 18:08 .
drwxr-xr-x  7 shields ncar 131072 Jun 12 15:04 ..
drwxr-xr-x  4 shields ncar 131072 Jun 12 18:08 atm
drwxr-xr-x  4 shields ncar 131072 Jun 12 18:08 cpl
drwxr-xr-x  5 shields ncar 131072 Jun 12 18:08 dart
drwxr-xr-x  4 shields ncar 131072 Jun 12 18:08 glc
drwxr-xr-x  4 shields ncar 131072 Jun 12 18:08 ice
drwxr-xr-x  4 shields ncar 131072 Jun 12 18:08 lnd
drwxr-xr-x  4 shields ncar 131072 Jun 12 18:08 ocn
drwxr-xr-x  3 shields ncar 131072 Jun 12 18:08 rest
drwxr-xr-x  4 shields ncar 131072 Jun 12 18:08 rof
drwxr-xr-x  4 shields ncar 131072 Jun 12 18:08 wav
cases/case01>ls -l $DOUT_S_ROOT/cpl
total 256
drwxr-xr-x  2 userx  ncar          65536 May 18 18:37 hist
drwxr-xr-x  2 userx  ncar          65536 May 18 18:37 logs
cases/case01>ls -l $DOUT_S_ROOT/cpl/logs/
total 256
-rw-r--r--  1 userx  ncar          19115 May 18 18:37 cesm.log.100518-183212.gz
-rw-r--r--  1 userx  ncar           4998 May 18 18:37 cpl.log.100518-183212.gz
cases/case01>ls -l $DOUT_S_ROOT/ocn/hist
total 436608
-rw-r--r--  1 userx  ncar           3 May 18 18:32 mycase1.pop.dd.0001-01-02-00000
-rw-r--r--  1 userx  ncar          2787 May 18 18:36 mycase1.pop.do.0001-01-02-00000
-rw-r--r--  1 userx  ncar           3 May 18 18:32 mycase1.pop.dt.0001-01-02-00000
-rw-r--r--  1 userx  ncar          1183 May 18 18:36 mycase1.pop.dv.0001-01-02-00000
-rw-r--r--  1 userx  ncar       27046596 May 18 18:36 mycase1.pop.h.nday1.0001-01-02.nc
-rw-r--r--  1 userx  ncar       78164092 May 18 18:33 mycase1.pop.h.once.nc
-rw-r--r--  1 userx  ncar      117965260 May 18 18:32 mycase1.pop.hv.nc
```

(4) Overview of Directories (+ run + short term archive)

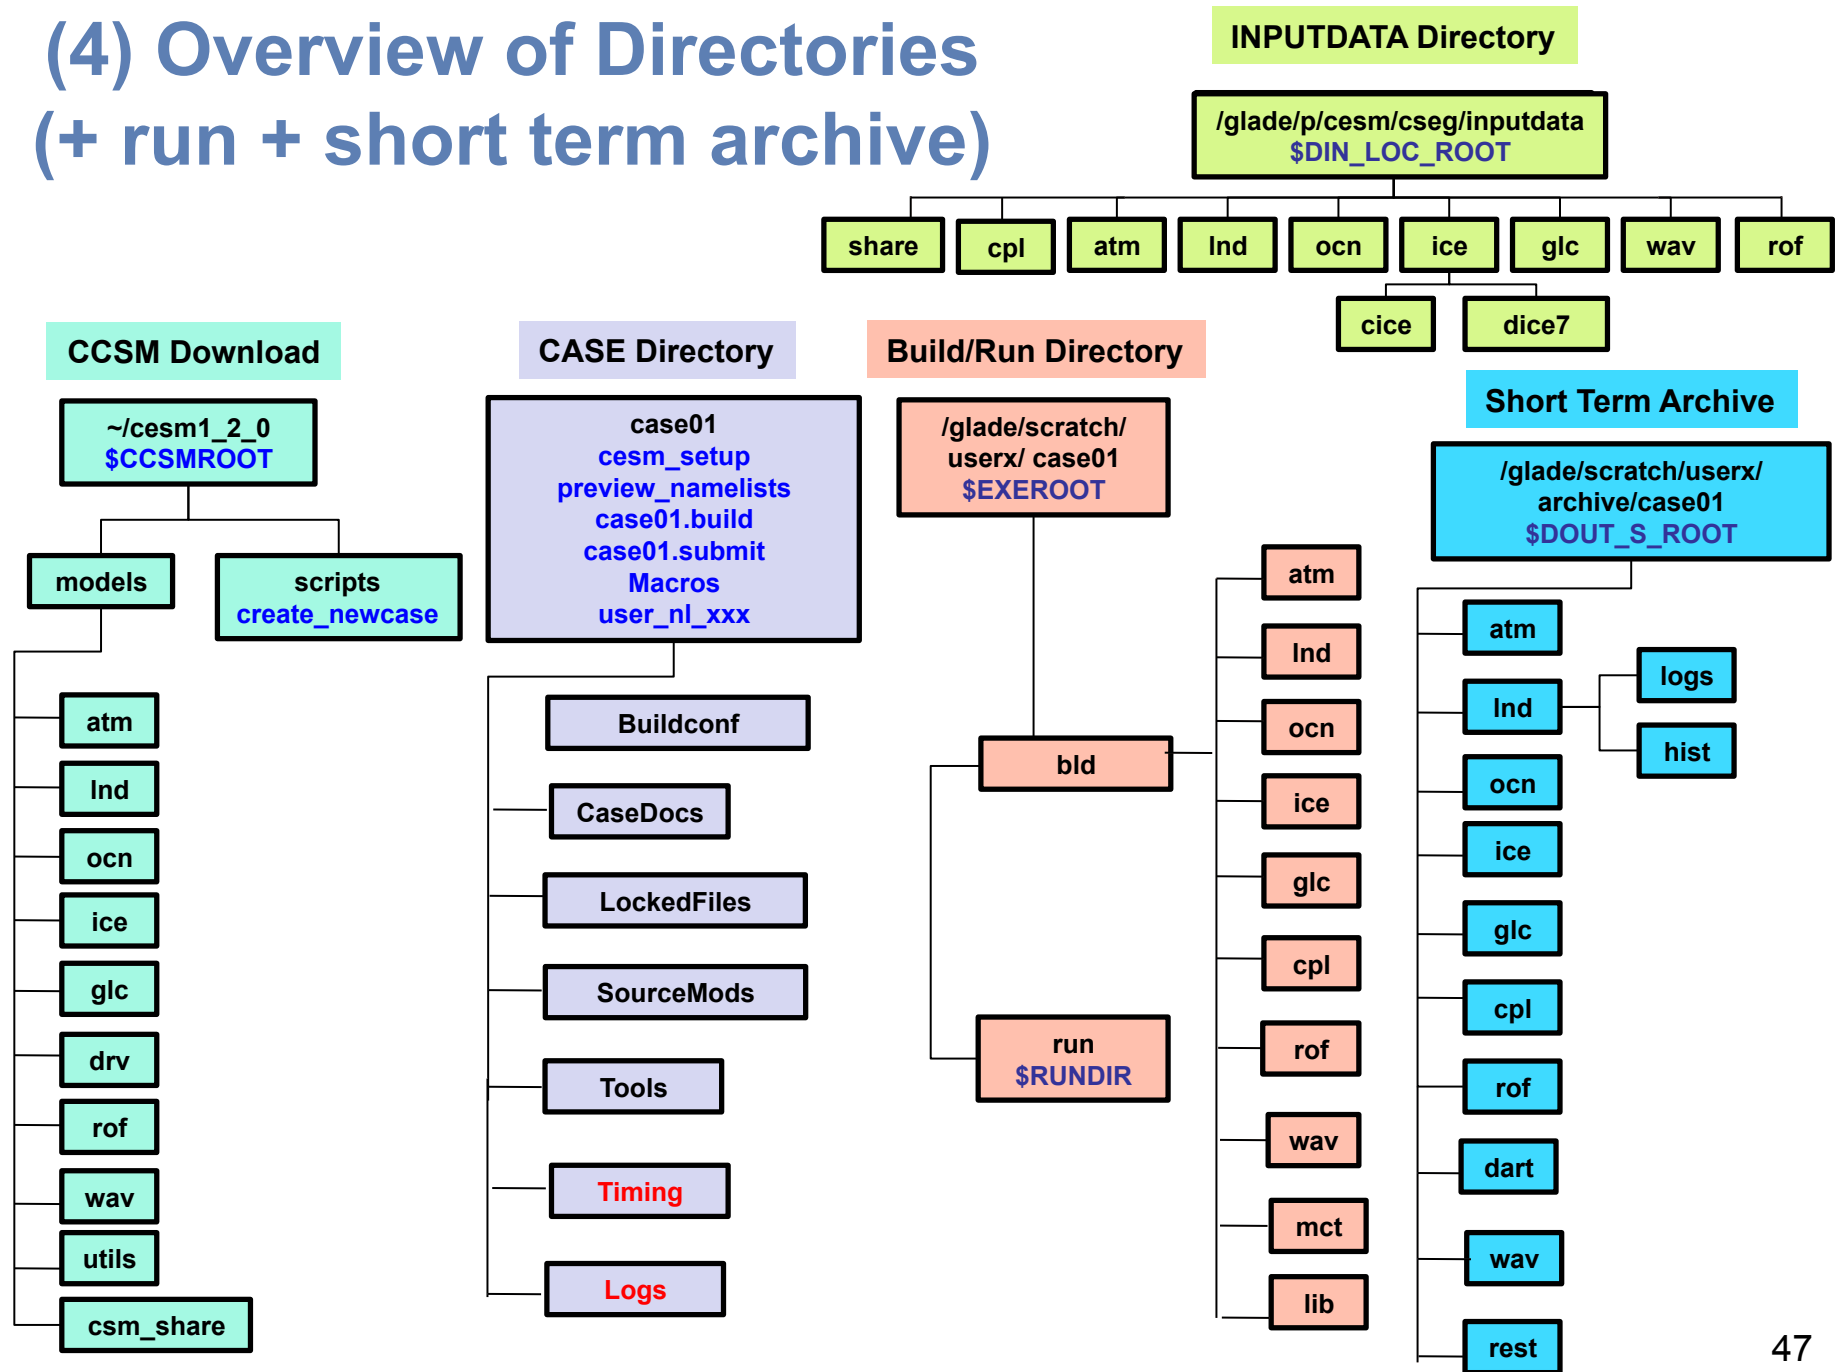

Basic Work Flow

(or how to set up and run an experiment)

- **One-Time Setup Steps**

- (A) Registration and Download

- (B) Create an Input Data Root Directory

- (C) Porting

- **Creating & Running a Case**

- (1) Create a New Case

- (2) Invoke `cesm_setup`

- (3) Build the Executable

- (4) Run the Model: Initial Run and Output Data Flow



- (5) Run the Model: Continuation Run(s)

Work Flow: Super Quick Start

These unix commands built and ran the model on a supported machine named "yellowstone"

```
# go to root directory of source code download
cd /path_to_source_code_download/cesm1_2_0/

# go into scripts subdir
cd scripts

# (1) create a new case in your home dir
./create_newcase -case ~/cases/case01 -res f19_g16 -compset B_1850 -mach
yellowstone

# go into the case you just created in the last step
cd ~/cases/case01/

# (2) invoke cesm_setup
./cesm_setup

# (3) build the executable
./case01.build

# (4) submit an initial run to the batch queue
./case01.submit

# check status of job and output files
Bjobs

source Tools/ccsm_getenv
ls -lFt $RUNDIR
ls -l logs

# when the initial run finishes, change to a continuation run
./xmlchange -CONTINUE_RUN=TRUE

# (5) submit a continuation run to the batch queue
./case01.submit

# check status of job and output files
bjobs
ls -l logs
```

(5) Running the Model: Continuation Runs

- Start with a short initial run, described in step (4)
- Examine output to verify that the run is doing what you want
- If the initial run looks good, step (5) is a continuation run

- Change `CONTINUE_RUN` to `TRUE` in `env_run.xml`
- Change `STOP_OPTION` in `env_run.xml` to run the model longer

- May want to turn on auto-resubmit option in `env_run.xml` (`RESUBMIT`)

- May want to turn on “long term archiving” in `env_run.xml` (`DOUT_L_MS`)


(5) Long Term Archiving

- **Why?**
 - Migrates output data away from a possibly volatile **\$DOUT_S_ROOT** into a permanent long-term storage area
 - Long term archiving script moves data conveniently and in parallel
- To turn on short term archiving (**default is on**)
 - Set **DOUT_S** to **TRUE** in **env_run.xml**
- To turn on long term archiving (**default is off**)
 - Set **DOUT_L_MS** to **TRUE** and set **DOUT_L_MSROOT** in **env_run.xml**
 - Causes run script to automatically submit a long term archiver job (***.l_archive**) at the end of every successful run.
- Long term archiver
 - Moves data from the short term archive directory to a long term archiving system (e.g. HPSS) - if one exists
 - Runs in batch on one processor
 - Can run in parallel with a production job; will not interfere

(5) Overview of Directories (+ long term archive)



INPUTDATA Directory

/glade/p/cesm/cseg/inputdata
\$DIN_LOC_ROOT

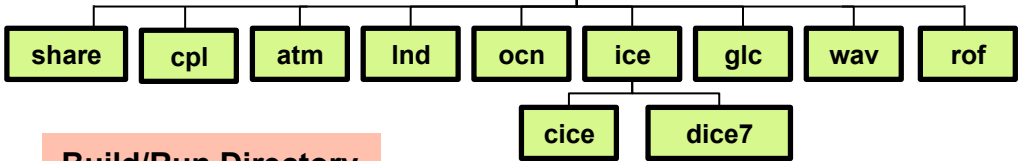

Short Term Archive


/glade/scratch/userx/
archive/case01
\$DOUT_S_ROOT

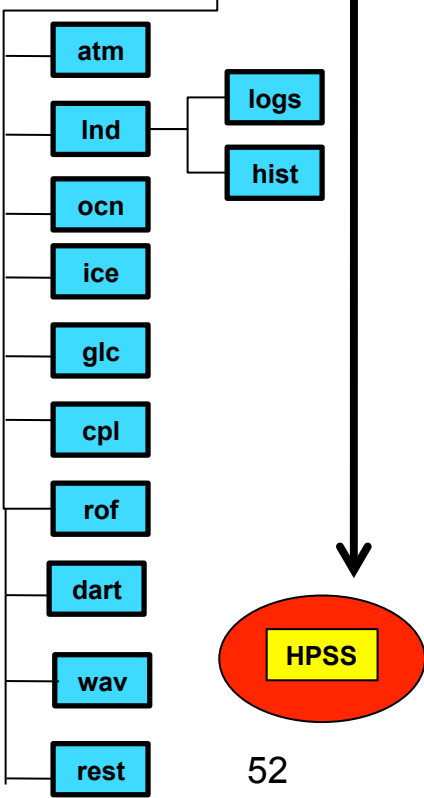

52


Build/Run Directory

/glade/scratch/
userx/ case01
\$EXEROOT

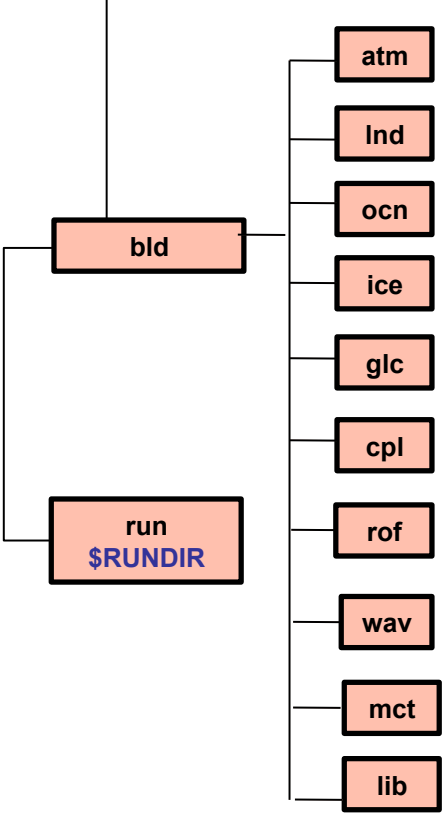


CASE Directory

case01
cesm_setup
previu_namelists
case01.build
case01.submit
Macros
user_nl_XXX

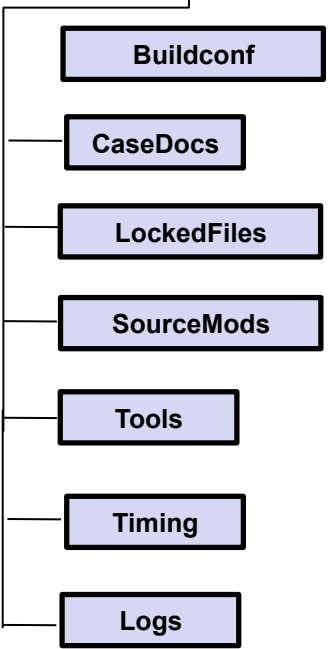

CCSM Download

~/cesm1_2_0
\$CCSMROOT

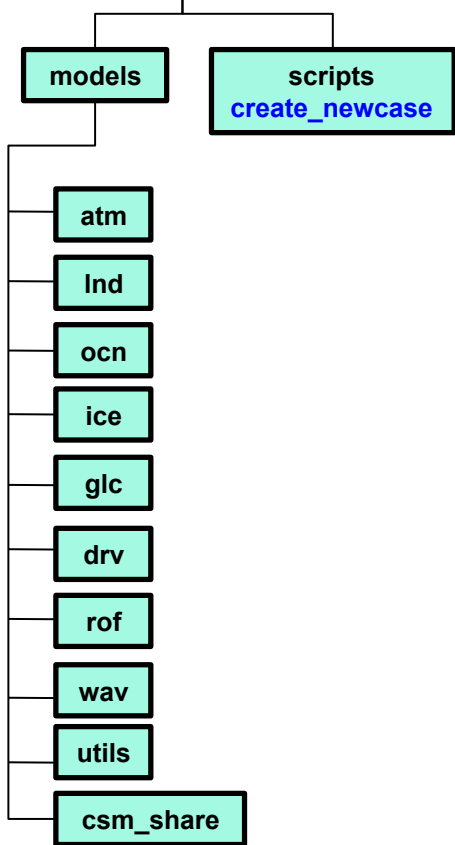

More Information/Getting Help

- **Model User Guides (please provide feedback)**
 - <http://www.cesm.ucar.edu/models/cesm1.2/>
 - **CESM Users Guide and Web-Browseable code reference**
 - **CAM, CLM, POP2, CICE, Data Model, RTM, and CPL7 Users Guides**
- **CESM Bulletin Board/Discussion Forums**
 - <http://bb.cgd.ucar.edu/>
 - **Facilitate communication among the community**
 - **Ask questions, look for answers – *all user questions and problems should be posted here***
 - **Many different topics**
- **CESM Release Page Notes**
 - <http://www.cesm.ucar.edu/models/cesm1.2/tags/>
 - **Notes significant bugs or issues as they are identified**
- **Model output is available on the Earth System Grid**
 - <http://www.earthsystemgrid.org>

Thank You!

Appendix

- A) Steps: Review and Undo
- B) Production Runs
- C) Debugging
- D) Porting
- E) Timing, Performance, Load Balancing
- F) Testing

The NESL Mission is:

To advance understanding of weather, climate, atmospheric composition and processes;
To provide facility support to the wider community; and,
To apply the results to benefit society.

NCAR is sponsored by the National Science Foundation



Appendix A: Steps, Review and How to Undo previous steps

Steps	How to Undo or Change	Associated xml Files
create_newcase	rm -rf \$CASE and rerun	env_case.xml
cesm_setup	cesm_setup -clean	env_mach_pes.xml
\$CASE*.build	\$CASE*.clean_build	env_build.xml, Macros.*
\$CASE*.run	rerun \$CASE*.run	env_run.xml
short term archive	set DOUT_S to False	env_run.xml
\$CASE*.l_archive	set DOUT_L_MS to False	env_run.xml

Appendix B: Production Runs

•Verify

- Setup and inputs
- performance, throughput, cost, and load balance
- exact restart for the production configuration. Use "create_production_test" in the case directory.

•Carry out an initial run and write out a restart set at the end of the run

- Set STOP_OPTION to "nmonths", set STOP_N
- Set REST_OPTION==STOP_OPTION and REST_N==STOP_N to get a restart at end of run

•When initial run is complete

- Set CONTINUE_RUN to TRUE in env_run.xml this puts the model in restart mode and the model will start again from the last restart set
- Reset STOP_N to a larger value if appropriate
- Leave REST_OPTION==STOP_OPTION and REST_N==STOP_N

•To turn on short term archiving

- Set DOUT_S to TRUE in env_run.xml

•To turn on long term archiving

- Set DOUT_L_MS to TRUE in env_run.xml
- Causes the run script to automatically submit a long term archiver job at the end of every successful run. The long term archiver moves data from the short term archive directory to a mass storage system, runs in batch on one processor, can run in parallel with a production job, and will not interfere with a production job or vice versa.

•To turn on the auto resubmit feature

- Set RESUBMIT to an integer > 0 in env_run.xml; this causes the run script to resubmit itself after a successful run and decrement the RESUBMIT variable by 1. The model will automatically resubmit until the RESUBMIT variable is decremented to 0.

Appendix C: Debugging

- **The CESM scripts will trap** invalid env variable values and types when possible and produce an error message
- **The scripts can detect** when the model needs to be re-configured or re-built due to changes in setup (env and Macros) files and an error message will be produced.
- **If input data is not available locally**, it will be downloaded automatically. If that data is not available on the CESM input data server, an error message will be produced.
- **"cesm_setup –clean"** removes the batch run script for target machines. Macros and user_nl_xxx files are never removed by this command. You must remove them manually. A history of your build and machine settings are saved to the PSetupHist subdirectory which is created in your case directory.
- **If the build step fails**, an error message will be produced and point users to a specific build log file.
- **If a run does NOT complete properly**, the stdout file often produces an error message like "Model did not complete – see .../cpl.log...". That cpl log file is associated with the run but may not contain a relevant error message. All the log files will need to be reviewed.
- **If a run does NOT complete properly**, short term archiving is NOT executed and the timing files are NOT generated. In addition, log files are NOT copied into the case logs directory. Review the stdout/stderr files in the case directory and "cd" to the \$RUNDIR directory and systematically check the latest log files for error messages.
- **If a run does NOT complete properly**, check whether it timed out because it hit the batch time limit. If it hit the time limit, does it appear to have been running when it timed out or did it hang before it timed out? Check the timestamps on the log files in \$RUNDIR and check the timestamps of the daily timers in the cpl.log file.

Appendix D: Porting – Machines Directory

- Go to the scripts directory
- ccsm_utils/Machines contains machine specific information, porting changes will occur there

```
CESM1_2/scripts>ls -l
total 2944
drwxr-sr-x 5 jshollen cseg 131072 May  7 13:53 .
drwxr-sr-x 6 jshollen cseg 131072 May  7 13:53 ..
drwxr-sr-x 8 jshollen cseg 131072 May  7 13:53 ccsm_utils
-rw-r--r-- 1 jshollen cseg 581940 May  7 13:53 ChangeLog
-rwxr-xr-x 1 jshollen cseg  19229 May  7 13:53 create_clone
-rwxr-xr-x 1 jshollen cseg   81134 May  7 13:53 create_newcase
-rwxr-xr-x 1 jshollen cseg   54590 May  7 13:53 create_test
drwxr-sr-x 5 jshollen cseg 131072 May  7 13:53 doc
-rwxr-xr-x 1 jshollen cseg   1255 May  7 13:53 link_dirtree
-rwxr-xr-x 1 jshollen cseg  12701 May  7 13:53 query_tests
-rw-r--r-- 1 jshollen cseg   2345 May  7 13:53 README
-rw-r--r-- 1 jshollen cseg   1113 May  7 13:53 sample_pes_file.xml
drwxr-sr-x 6 jshollen cseg 131072 May  7 13:53 .svn
-rw-r--r-- 1 jshollen cseg    203 May  7 13:53 SVN_EXTERNAL_DIRECTORIES
```

ccsm_utils

```
CESM1/scripts>ls -l ccsm_utils
total 112
drwxr-xr-x  3 userx  ncar      8192 May 12 11:33 Build
drwxr-xr-x  3 userx  ncar      8192 May 12 11:33 Case.template
drwxr-xr-x  3 userx  ncar      8192 May 12 11:33 Components
drwxr-xr-x  3 userx  ncar      8192 May 12 11:33 Machines
drwxr-xr-x  3 userx  ncar      8192 May 12 11:33 Testcases
drwxr-xr-x  3 userx  ncar      8192 May 12 11:33 Testlists
drwxr-xr-x  5 userx  ncar      8192 May 12 11:33 Tools
```

Machines

Appendix D (cont): Porting - Methods

- Detailed instructions necessary to port CESM to different machines can be found in the User's Guide.
- Porting steps have changed since the last release.
- We highly recommend you refer to the User's Guide. For further help, contact us through email or one of the discussion forums.

<http://www.cesm.ucar.edu/models/cesm1.2/cesm/doc/usersguide/c1719.html>

Appendix E: Timing

- **env_mach_pes.xml** sets the component pe layout, to change it

- **Modify env_mach_pes.xml**

- **Clean case and setup again**

```
case01> ./cesm_setup -clean
```

```
case01> ./cesm_setup
```

- **Clean and rebuild executables**

```
case01> ./case01.clean_build
```

```
case01> ./case01.build
```

- **Resubmit**

```
case01> case01.submit
```

- **Timing Files**

- **See case01/logs/cpl.log* file to verify completion and get throughput, basic timing and memory output. cpl.log* also provides timing for each model day run so temporal variability in cost can be assessed.**

- **See case01/timing/ccsm_timing.case01.* file for throughput and load balance (next slide)**

- **See case01/timing/ccsm_timing_stats.* for individual rawer model timing output**

- **Check log file: case01>tail -20 logs/cpl.log.100519-210440**

```
tStamp_write: model date = 10120      0 wall clock = 2010-05-19 21:11:07 avg dt = 16.43 dt = 16.12
tStamp_write: model date = 10121      0 wall clock = 2010-05-19 21:11:23 avg dt = 16.43 dt = 16.34

(seq_mct_drv): ===== SUCCESSFUL TERMINATION OF CPL7-CCSM =====
(seq_mct_drv): ===== at YMD,TOD = 10121 0 =====
(seq_mct_drv): ===== # simulated days (this run) = 20.000 =====
(seq_mct_drv): ===== compute time (hrs) = 0.091 =====
(seq_mct_drv): ===== # simulated years / cmp-day = 14.410 =====
(seq_mct_drv): ===== pes min memory highwater (MB) 324.382 =====
(seq_mct_drv): ===== pes max memory highwater (MB) 787.038 =====
```

Appendix E (cont): Performance & Load Balance

- Load Balance

- Set STOP_OPTION to 'ndays', STOP_N to 20, REST_OPTION to 'never'

case01>cat timing/ccsm_timing.case01.100519-210440

component	comp_pes	root_pe	tasks	x threads	instances	(stride)
cpl = cpl	120	0	60	x 2	1	(1)
glc = sglc	120	0	60	x 2	1	(1)
wav = swav	120	0	60	x 2	1	(1)
lnd = clm	60	0	30	x 2	1	(1)
rof = rtm	60	0	30	x 2	1	(1)
ice = cice	60	0	30	x 2	1	(1)
atm = cam	120	0	60	x 2	1	(1)
ocn = pop2	60	60	30	x 2	1	(1)

total pes active	: 180
pes per node	: 16
pe count for cost estimate	: 96

Overall Metrics:

Model Cost:	149.33	pe-hrs/simulated_year
Model Throughput:	15.43	simulated_years/day

Init Time	:	31.609	seconds
Run Time	:	76.709	seconds
Final Time	:	0.032	seconds

<snippet>


TOT Run Time:	76.709	seconds	15.342	seconds/mday
LND Run Time:	4.261	seconds	0.852	seconds/mday
ROF Run Time:	0.632	seconds	0.126	seconds/mday
ICE Run Time:	10.565	seconds	2.113	seconds/mday
ATM Run Time:	56.801	seconds	11.360	seconds/mday
OCN Run Time:	8.299	seconds	1.660	seconds/mday
GLC Run Time:	0.000	seconds	0.000	seconds/mday
WAV Run Time:	0.000	seconds	0.000	seconds/mday
CPL Run Time:	3.807	seconds	0.761	seconds/mday
CPL COMM Time:	37.395	seconds	7.479	seconds/mday

Tasks and Threads

Appendix E (cont): Load Balancing & env_mach_pes.xml

- Some env_mach_pes.xml variables are
- NTASKS_* - number of mpi tasks assigned to the component
- NTHRDS_* - number of openmp threads per mpi task for the component
- ROOTPE_* - global mpi task rank of the component root mpi task

A SIMPLE EXAMPLE:

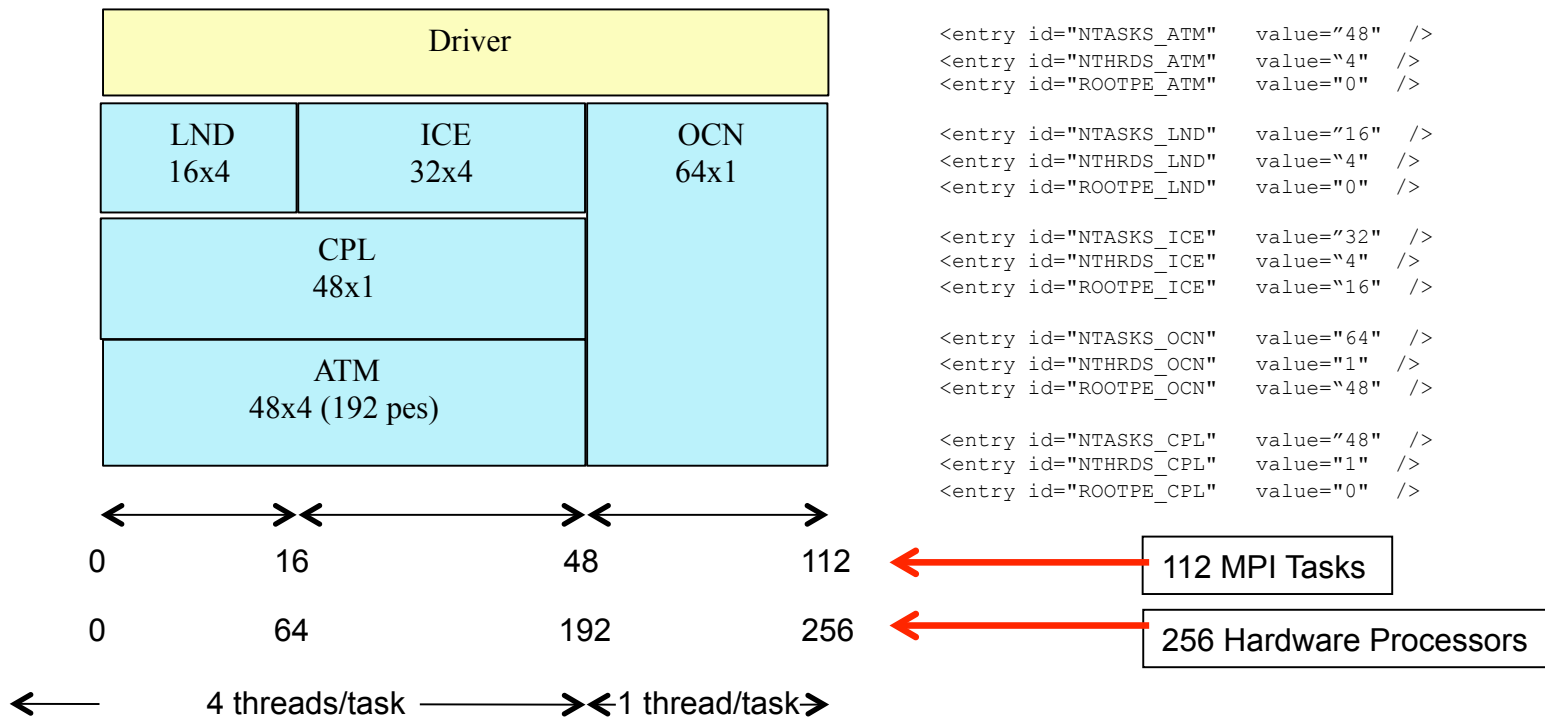

Appendix F: Testing

- **create_production_test**
 - Automatically creates a production restart test for the current case
 - The test case is created in a parallel directory and called `<current case>_<testname>`
- **create_production_test - help** explains usage and produces a list of available test types, i.e. `<testname>`

- **To use:**

```
cases/case01> ./create_production_test -testname ERT  
cases/case01> cd case01.ERT  
cases/case01_ERT > ./case01_ERT.build  
cases/case01_ERT > ./case01_ERT.submit  
cases/case01_ERT> cat TestStatus
```

```
cases/case01_ERT> cat TestStatus  
      > PASS case01_ERT  
      > PASS case01_ERT.memleak
```